

DeVorm



Twist
PET Felt Bar Stool

Productsheet

Twist was designed for every situation that requires flexible seating. This playful stool comes in a bar height to accommodate various meeting and dining situations in offices, restaurants and bars. The frame is made from recycled steel, further enhancing its sustainable profile. Thanks to its lightweight design and double-sided grip, Twist can be stacked when extra space is needed, and easily moved around to accommodate any occasion.



Design by

De Vorm

Features

- Made from recycled PET bottles and steel
- Also available in desk and counter height
- Optional seat upholstery
- Suitable for contract use
- Stackable up to 8 pieces
- Delivered preassembled

Materials

Seat: PET Felt (Martindale 100.000, Pilling 3/4)


Upholstery (optional): Fabric + high-resilience foam

Frame: Powder-coated steel, high strength steel

Gliders: PE / Felt

Colours

Seat + backrest

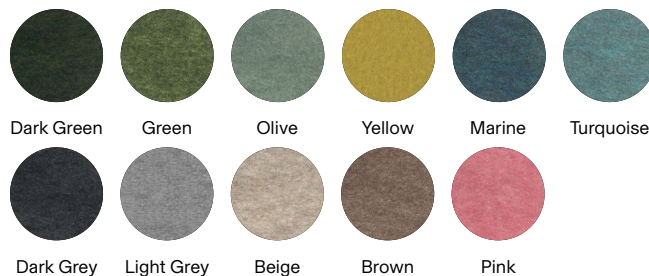

Due to the recycled content of the PET felt, colour differences may occur.

Frame

Standard (70% gloss degree):

RAL 9011 (Black)

RAL 9010 (White)

Custom (70% gloss degree):

Any RAL colour

Fine texture:

RAL 1012 (Yellow)

RAL 3005 (Pink)

RAL 5008 (Marine)

RAL 5020 (Turquoise)

RAL 6007 (Dark Green)

RAL 6020 (Green)

RAL 7015 (Dark Grey)

RAL 7033 (Olive)

RAL 7044 (Beige)

RAL 7045 (Light Grey)

RAL 8014 (Brown)

RAL 9011 (Graphite Black)

Fine texture finishes are ton sur ton with PET Felt colours.

Upholstery (optional)

Kvadrat collection




Bespoke options

Create a custom design in the Configurator at devorm.nl

Weight

4.7 kg (+0.3 kg with upholstery)

Measurements

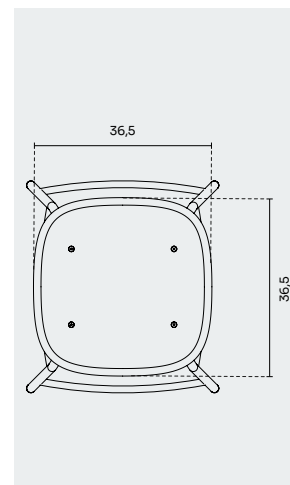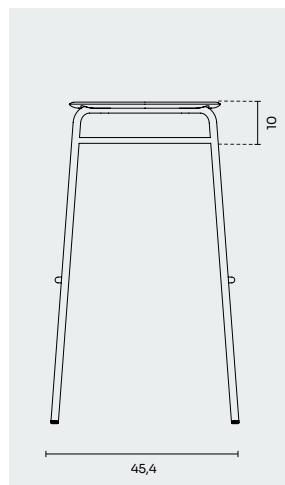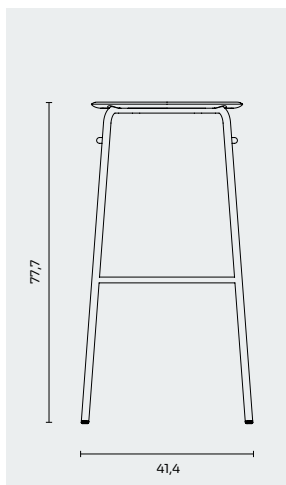

Certificates + reports

- ANSI-BIFMA X5.1-2017 General purpose office chairs
- BS 5852:2006 Ignitability test (performed on PET Felt)
- ISO 12947-2:2016 Abrasion resistance test (performed on PET Felt)
- ISO 12945-2:2000 Pilling Martindale (performed on PET Felt)
- Product footprint report

Care + maintenance

Due to its porous structure, PET Felt can be easily cleaned with water. To remove most stains, it is sufficient to apply a copious amount of water and let it drip through. Do not rub the PET felt surface to avoid excessive pilling. If water is not sufficient, stubborn stains can be removed with professional cleaning products like the James cleaning set.

Downloads

3D files, technical drawings and Hi-Res images are available in the Download Library at devorm.nl.

Additional information

You can find further maintenance recommendations, warranty terms and corporate information in the Information bank at devorm.nl