

### Wireline

■ F9520039 - Green

Designed by Formafantasma


Suspension lamp with diffused light. Tubular in transparent extruded glass and internal diffuser in opal PC. Ferrules made with CNC technology in satin stainless steel. Extruded cable in pink and forest green rubber. Injection molded PC rosette in the same finishes as the cable. The electronics integrated in the ceiling rose allows the use of different dimerization systems: push, 1-10, potentiometer, DALI. In the absence of these systems, the luminous flux can be set during installation, with the push system included in the canopy. Useful length of the cable 3mt.

### Main specifications

<b>Mounting</b>	Suspension	<b>Lamp holder</b>	LED Module
<b>Environment</b>	Indoor dry location	<b>Autoprotected Lamp</b>	No
<b>Light source type</b>	LED	<b>Number of heads</b>	1
<b>Light source replaceable</b>	Replaceable (LED only) light source by a professional	<b>Source Power (W)</b>	45
		<b>System Power (W)</b>	45
<b>LED type</b>	LED Module		
<b>System Flux (lm)</b>	2793		

### Optical

<b>Lighting Type</b>	Total
<b>Lighting distribution</b>	Symmetric
<b>CCT (K)</b>	2700
<b>CRI&gt;</b>	90
<b>Cold Beam Lighting</b>	No
<b>Extreme Cut off</b>	No

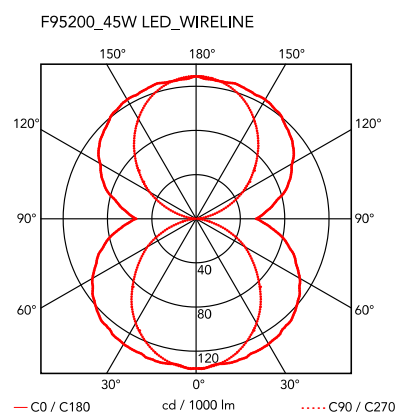

### Electrical

<b>Insulation class</b>	I	<b>Batteries Inside</b>	No
<b>Frequency (Hz)</b>	50/60	<b>Power supply replaceable</b>	Replaceable control gear by a professional
<b>Main Voltage (Vac)</b>	120-277		
<b>Driver</b>	Integrated	<b>Cord length (mm)</b>	2000/4050
<b>Dimmable type</b>	Dimmable 0-10V, Dimmable Push, Dimmable 1-10V, Dimmable DALI 1		

### Physical

<b>Colour</b>	Green	<b>IP external</b>	20
<b>Length (mm)</b>	1300		
<b>Net weight (kg)</b>	7.8		
<b>Gross weight (kg)</b>	17.2		
<b>IP</b>	20		

