

Wirering White

■ F9512009 - White Cable/White Ring

Designed by Formafantasma


Indirect light wall lighting device with body in calendered, extruded aluminium with galvanised or varnished finish. The special tangent cable, in coloured rubber, provides the power. The cable is fixed to the wall with ABS joints in the same finish as the ring. Dimming via switch pedal on the cable. Power supply on adapter with interchangeable plugs. Useful cable length is 2.5 metres.

Main specifications

Mounting	Wall	Lamp holder	LED Module
Environment	Indoor dry location	Autoprotected Lamp	No
Light source type	LED	Number of heads	1
Light source replaceable	Replaceable (LED only) light source by a professional	Source Power (W)	16
	LED Module	System Flux (lm)	712

Optical

Lighting Type	Indirect
Lighting distribution	Asymmetric
CCT (K)	2700
CRI>	90
Cold Beam Lighting	No
Extreme Cut off	No

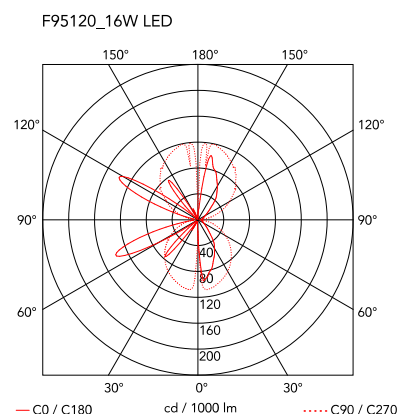

Electrical

Insulation class	III	Batteries Inside	No
Frequency (Hz)	50/60	Power supply replaceable	Replaceable control gear by an end-user
Main Voltage (Vac)	100-240/24	Cord length (mm)	2500
Driver	Remote included	Plug Type	Type G, Type A, Type C
Dimmable type	Electronic 12V	Charging Min Time	No

Physical

Colour	White Cable/White Ring	IP external	20
Length (mm)	317		
Net weight (kg)	0.95		
Gross weight (kg)	2.08		
IP	20		

