


PURE LOOP MONO 5 star updown  
5034-5SUP  
Design Claus Breinholt

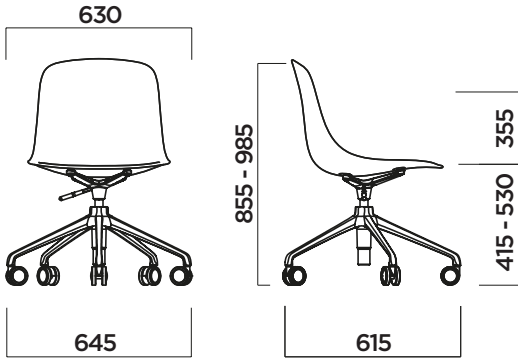

BASE AND SUPPORT

BASE E SUPPORTO  
BASE AND SUPPORT

Polished die casting aluminium 5 star base.  
Base 5 razze alluminio presso fuso pulito.  
Base 5 radios de aluminio fundido a presión pulido.

00L	30	31	514F	503F	6013F	3009F

SHELL

SCOCCA  
CARCASA

Post consumer industrial Polypropylene + Glass Fiber  
Post consumer industrial Polypropylene + Glass Fiber  
Post consumer industrial Polypropylene + Glass Fiber

IR8022	IR6013	IP7608U	IS503

Polypropylene + Glass Fiber  
Polypropylene + Glass Fiber  
Polypropylene + Glass Fiber

S020	S514	P421C

SUPPORT

SUPPORTO  
SOPORTE

Polished die casting aluminium.  
Alluminio presso fuso pulito.  
Aluminio fundido a presión pulido

FINISHING

FINITURA  
ACABADO

Painted aluminium base and support with epoxy-polyester powder with average thickness of 50 µ.  
Base e supporto in alluminio verniciato a polvere epossipoliestere con spessore medio di 50 µ  
Base y soporte de aluminio con recubrimiento en polvo epoxi-poliéster con 50 µ de espesor medio.

CASTORS

RUOTE  
RUEDAS PIVOTANTES


Castors diam. 60 stem 11.  
Ruote diam. 60 stem 11.  
Ruedas pivotantes diám. 60 perno 11.

PKG

IMBALLO  
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
	64	64	88.5	0.36	1	12.2

PURE LOOP MONO 5 star updown upholstered seat panel  
5034-5SUS  
Design Claus Breinholt

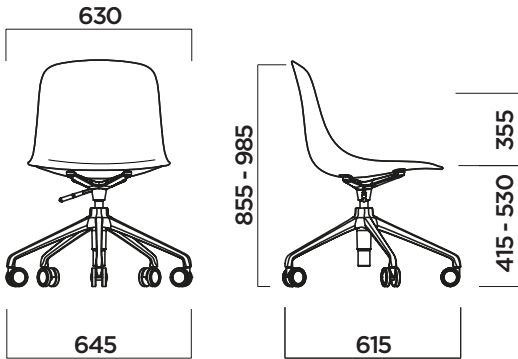

BASE AND SUPPORT  
BASE E SUPPORTO  
BASE AND SUPPORT

Polished die casting aluminium 5 star base.  
Base 5 razze alluminio presso fuso pulito.  
Base 5 radios de aluminio fundido a presión pulido.

00L	30	31	514F	503F	6013F	3009F

SHELL  
SCocca  
CARCASA

Post consumer industrial Polypropylene + Glass Fiber  
Post consumer industrial Polypropylene + Glass Fiber  
Post consumer industrial Polypropylene + Glass Fiber

IR8022	IR6013	IP7608U	IS503

Polypropylene + Glass Fiber  
Polypropylene + Glass Fiber  
Polypropylene + Glass Fiber

S020	S514	P421C

UPHOLSTERY  
TAPPEZZERIA  
TAPIZADOS

Upholstered seat panel in PP with cutted foam thickness 1 cm and density 50 kg/m3  
Upholstered seat panel in PP with cutted foam thickness 1 cm and density 50 kg/m3  
Upholstered seat panel in PP with cutted foam thickness 1 cm and density 50 kg/m3

- A Space,Panarea
- B Eco Leather
- C Convert D,Velvety,Step, Step Melange, Nuvole
- D Reflect
- E Field, Oceanic , Yoredale
- F Steelcut Quartet,Canvas2
- G Divina3, Divina Melange, Fiord
- H Full Leather

COM Fabric(m)	COM Leather(m2)
0.60	0.75

SUPPORT  
SUPPORTO  
SOPORTE

Polished die casting aluminium.  
Alluminio presso fuso pulito.  
Aluminio fundido a presión pulido

FINISHING  
FINITURA  
ACABADO

Painted aluminium base and support with epoxy-polyester powder with average thickness of 50 µ.  
Base e supporto in alluminio verniciato a polvere epossipoliéster con spessore medio di 50 µ  
Base y soporte de aluminio con recubrimiento en polvo epoxi-poliéster con 50 µ de espesor medio.

CASTORS

RUOTE  
RUEDAS PIVOTANTES


Castors diam. 60 stem 11.  
Ruote diam. 60 stem 11.  
Ruedas pivotantes diám. 60 perno 11.

PKG

IMBALLO  
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
	46.5	57	81.5	0.22	1	13.5

PURE LOOP MONO 5 star updown fully upholstered  
5034-5SUT  
Design Claus Breinholt

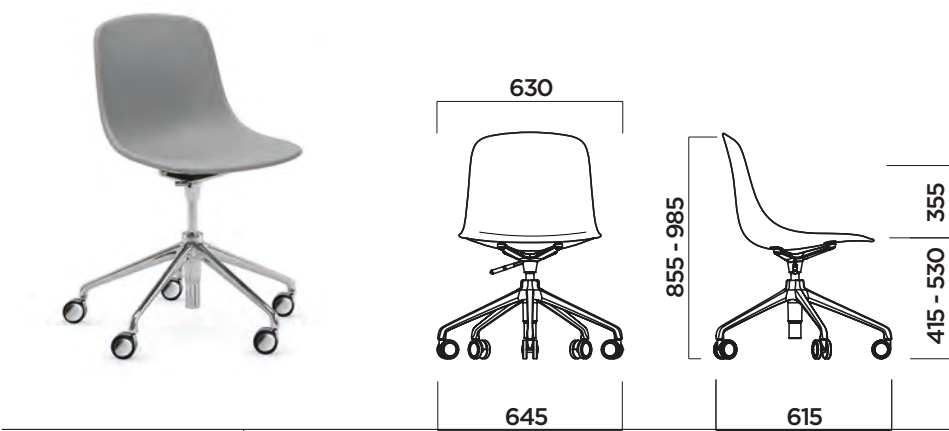

BASE AND SUPPORT  
BASE E SUPPORTO  
BASE AND SUPPORT

Polished die casting aluminium 5 star base  
Base 5 razze alluminio presso fuso pulito.  
Base 5 radios de aluminio fundido a presión pulido

00L	30	31	514F	503F	6013F	3009F

UPHOLSTERY  
TAPPEZZERIA  
TAPIZADOS

Full upholstered shell  
Full upholstered shell  
Full upholstered shell

- A Space,Panarea
- B Eco Leather
- C Convert D,Velvety,Step, Step Melange, Nuvole
- D Reflect
- E Field, Oceanic , Yoredale
- F Steelcut Quartet,Canvas2
- G Divina3, Divina Melange, Fiord
- H Full Leather

COM Fabric(m)	COM Leather(m2)
0,90	1,50

SUPPORT  
SUPPORTO  
SOPORTE

Polished die casting aluminium  
Alluminio presso fuso pulito.  
Aluminio fundido a presión pulido

FINISHING  
FINITURA  
ACABADO

Painted aluminium base and support with epoxy-polyester powder with average thickness of 50 µ.  
Base e supporto in alluminio verniciato a polvere epossipoliestere con spessore medio di 50 µ  
Base y soporte de aluminio con recubrimiento en polvo epoxi-poliéster con 50 µ de espesor medio.

CASTORS  
RUOTE  
RUEDAS PIVOTANTES

Castors diam. 60 stem 11.  
Ruote diam. 60 stem 11.  
Ruedas pivotantes diám. 60 perno 11.

PKG  
IMBALLO  
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
64	64	88.5	0.36	1	12.2	