


LOOP MONO swivel with castors  
5088-4SCP  
Design Claus Breinholt



BASE AND SUPPORT  
BASE E SUPPORTO  
BASE AND SUPPORT

Polished die casting aluminium 4 star base.  
Base 4 razze alluminio presso fuso pulito.  
Base 4 radios de aluminio fundido a presión pulido.

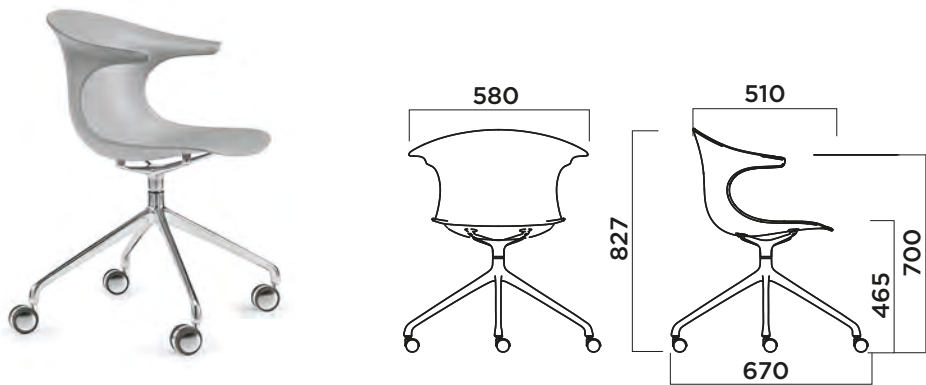

SHELL  
SCOCCA  
CARCASA

Post consumer industrial Polypropylene + Glass Fiber  
Post consumer industrial Polypropylene + Glass Fiber  
Post consumer industrial Polypropylene + Glass Fiber



Polypropylene + Glass Fiber  
Polypropylene + Glass Fiber  
Polypropylene + Glass Fiber



SUPPORT  
SUPPORTO  
SOPORTE

Polished die casting aluminium.  
Alluminio presso fuso pulito.  
Aluminio fundido a presión pulido

FINISHING  
FINITURA  
ACABADO

Painted aluminium base and support with epoxy-polyester powder with average thickness of 50 µ.  
Base e supporto in alluminio verniciato a polvere epossipoliestere con spessore medio di 50 µ.  
Base y soporte de aluminio con recubrimiento en polvo epoxi-poliéster con 50 µ de espesor medio.


CASTORS  
RUOTE  
RUEDAS PIVOTANTES

Castors diam. 60 stem 11.  
Ruote diam. 60 stem 11.  
Ruedas pivotantes diám. 60 perno 11.

PKG  
IMBALLO  
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
59	63	85.5	0.32	1	12.3	

LOOP MONO swivel with castors upholstered seat panel  
5088-4SCS  
Design Claus Breinholt

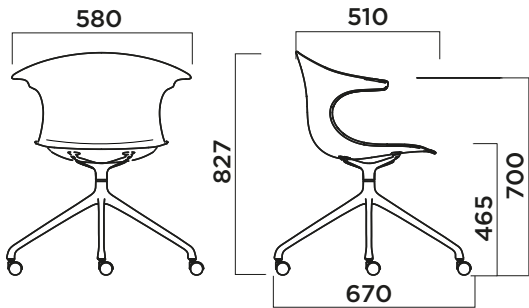

BASE AND SUPPORT  
BASE E SUPPORTO  
BASE AND SUPPORT

Polished die casting aluminium 4 star base.  
Base 4 razze alluminio presso fuso pulito.  
Base 4 radios de aluminio fundido a presión pulido.



SHELL  
SCocca  
CARCASA

Post consumer industrial Polypropylene + Glass Fiber  
Post consumer industrial Polypropylene + Glass Fiber  
Post consumer industrial Polypropylene + Glass Fiber



Polypropylene + Glass Fiber  
Polypropylene + Glass Fiber  
Polypropylene + Glass Fiber



UPHOLSTERY  
TAPPEZZERIA  
TAPIZADOS

Upholstered seat panel.  
Upholstered seat panel.  
Upholstered seat panel.

- A Space, Panarea
- B Eco Leather
- C Convert D, Velvety, Step, Step Melange, Nuvole
- D Reflect
- E Field, Oceanic, Yoredale
- F Steelcut Quartet, Canvas2
- G Divina3, Divina Melange, Fiord
- H Full Leather

COM Fabric(m)	COM Leather(m2)
0.60	0.75

SUPPORT  
SUPPORTO  
SOPORTE

Polished die casting aluminium.  
Alluminio presso fuso pulito.  
Aluminio fundido a presión pulido

FINISHING  
FINITURA  
ACABADO

Painted aluminium base and support with epoxy-polyester powder with average thickness of 50 µ.  
Base e supporto in alluminio verniciato a polvere epossipoliestere con spessore medio di 50 µ.  
Base y soporte de aluminio con recubrimiento en polvo epoxi-poliéster con 50 µ de espesor medio.

CASTORS

RUOTE  
RUEDAS PIVOTANTES


Castors diam. 60 stem 11.  
Ruote diam. 60 stem 11.  
Ruedas pivotantes diám. 60 perno 11.

PKG

IMBALLO  
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
59	63	85.5	0.32	1	13.5	

LOOP MONO swivel with castors fully upholstered  
5088-4SCT  
Design Claus Breinholt

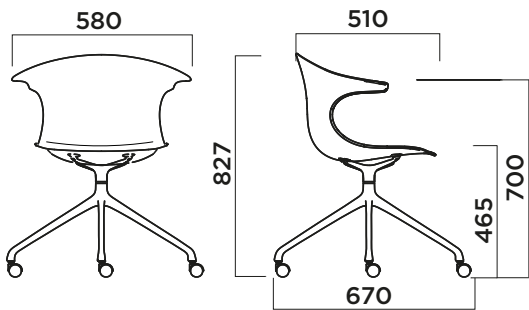

BASE AND SUPPORT

BASE E SUPPORTO  
BASE AND SUPPORT

Polished die casting aluminium 4 star base.  
Base 4 razze alluminio presso fuso pulito.  
Base 4 radios de aluminio fundido a presión pulido.

00L	30	31	514F	503F	6013F	3009F

UPHOLSTERY

TAPPEZZERIA  
TAPIZADOS

Full upholstered shell  
Full upholstered shell  
Full upholstered shell

- A Space,Panarea
- B Eco Leather
- C Convert D,Velvety,Step, Step Melange, Nuvole
- D Reflect
- E Field, Oceanic , Yoredale
- F Steelcut Quartet,Canvas2
- G Divina3, Divina Melange, Fiord
- H Full Leather

COM Fabric(m)	COM Leather(m2)
1,10	1,70

SUPPORT

SUPPORTO  
SOPORTE

Polished die casting aluminium.  
Alluminio presso fuso pulito.  
Aluminio fundido a presión pulido

FINISHING

FINITURA  
ACABADO

Painted aluminium base and support with epoxy-polyester powder with average thickness of 50 µ.  
Base e supporto in alluminio verniciato a polvere epossipoliestere con spessore medio di 50 µ  
Base y soporte de aluminio con recubrimiento en polvo epoxi-poliéster con 50 µ de espesor medio.

CASTORS

RUOTE  
RUEDAS PIVOTANTES

Castors diam. 60 stem 11.  
Ruote diam. 60 stem 11.  
Ruedas pivotantes diám. 60 perno 11.

PKG

IMBALLO  
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
59	63	85.5	0.32	1	12.3	