


PEB sled low back
5025-SLBT
Design BrogliatoTraverso



FRAME

TELAIO
BASTIDOR

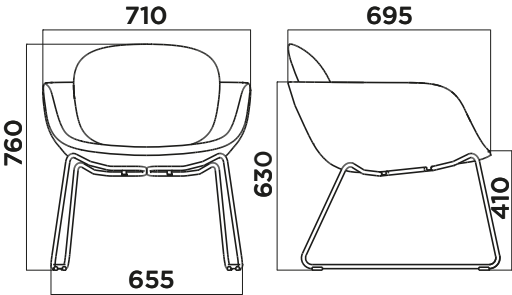


Metal frame in round tube diameter 16 mm, thickness 2 mm, accordingly with UNI EN 10305-3 rule in Asform.
Struttura in tubo tondo diametro 16 mm, spessore 2 mm, secondo norma UNI EN 10305-3 in Asform.
Bastidor metálico de tubo redondo de 16 mm de diámetro y 2 mm de espesor, conforme a la norma UNI EN 10305-3 en Asform.



UPHOLSTERY

TAPPEZZERIA
TAPIZADOS

Seat and back with polyurethane foam, upholstered.
Sedile e schienale schiumati con poliuretano, tappezzati.
Asiento y respaldo con espuma de poliuretano, tapizados.

- A Space,Panarea
- B Eco Leather
- C Convert D,Velvety,Step, Step Melange, Nuvole,Norfolk
- D Revive ,Reflect ,Rolla
- E Oceanic ,Yoredale,Volta Celeste
- F Steelcut Quartet,Canvas2
- G Divina Melange, Fiord
- H Full Leather

COM Fabric(m) COM Leather(m2)
In1.7+Out0.65 In2.3+Out1.2

FINISHING

FINITURA
ACABADO


Painted frame with epoxy-polyester powder with average thickness of 50 μ. Chromed frame with average thickness of 5 μ.
Telaio verniciato con polveri epossi-poliestere spessore medio di 50 μ. Telaio cromato con spessore medio 5 μ.
Bastidor con recubrimiento en polvo epoxi-poliéster con 50 μ de espesor medio. Bastidor cromado con 5 μ de espesor medio.

PKG

IMBALLO
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
74	71	74.5	0.39	1	19.2	

PEB sled high back
5025-SHBT
Design BrogliatoTraverso

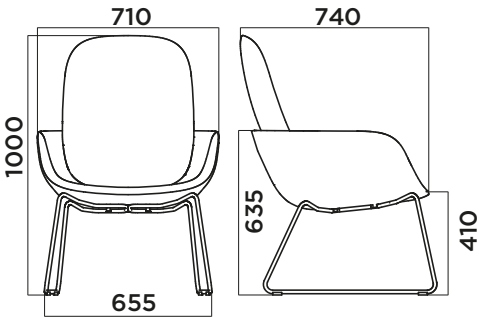

FRAME

TELAIO
BASTIDOR




Metal frame in round tube diameter 16 mm, thickness 2 mm, accordingly with UNI EN 10305-3 rule in Asform.
Struttura in tubo tondo diametro 16 mm, spessore 2 mm, secondo norma UNI EN 10305-3 in Asform.
Bastidor metálico de tubo redondo de 16 mm de diámetro y 2 mm de espesor, conforme a la norma UNI EN 10305-3 en Asform.



UPHOLSTERY

TAPPEZZERIA
TAPIZADOS

Seat and back with polyurethane foam, upholstered.
Sedile e schienale schiumati con poliuretano, tappezzati.
Asiento y respaldo con espuma de poliuretano, tapizados.

- A Space, Panarea
- B Eco Leather
- C Convert D, Velvety, Step, Step Melange, Nuvole, Norfolk
- D Revive , Reflect , Rolla
- E Oceanic , Yoredale, Volta Celeste
- F Steelcut Quartet, Canvas2
- G Divina Melange, Fiord
- H Full Leather

COM Fabric(m) COM Leather(m2)
In1.7+Out0.8 In2.3+Out1.55

FINISHING

FINITURA
ACABADO


Painted frame with epoxy-polyester powder with average thickness of 50 µ. Chromed frame with average thickness of 5 µ.
Telaio verniciato con polveri epossipoliesteri spessore medio di 50 µ. Telaio cromato con spessore medio 5 µ.
Bastidor con recubrimiento en polvo epoxi-poliéster con 50 µ de espesor medio. Bastidor cromado con 5 µ de espesor medio.

PKG

IMBALLO
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
82	83	113	0.77	1	20.3	

PEB sled modesty panel
5025-SMBT
Design BrogliatoTraverso

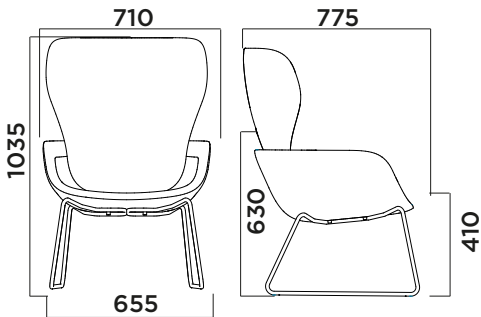

FRAME

TELAIO
BASTIDOR




Metal frame in round tube diameter 16 mm, thickness 2 mm, accordingly with UNI EN 10305-3 rule in Asform.
Struttura in tubo tondo diametro 16 mm, spessore 2 mm, secondo norma UNI EN 10305-3 in Asform.
Bastidor metálico de tubo redondo de 16 mm de diámetro y 2 mm de espesor, conforme a la norma UNI EN 10305-3 en Asform.



UPHOLSTERY

TAPPEZZERIA
TAPIZADOS

Seat and back with polyurethane foam, upholstered.
Sedile e schienale schiumati con poliuretano, tappezzati.
Asiento y respaldo con espuma de poliuretano, tapizados.

- A Space, Panarea
- B Eco Leather
- C Convert D, Velvety, Step, Step Melange, Nuvole, Norfolk
- D Revive , Reflect , Rolla
- E Oceanic , Yoredale, Volta Celeste
- F Steelcut Quartet, Canvas2
- G Divina Melange, Fiord
- H Full Leather

COM Fabric(m) COM Leather(m2)

In1.7+Out0.65 In2.3+Out1.2

FINISHING

FINITURA
ACABADO

Painted frame with epoxy-polyester powder with average thickness of 50 µ. Chromed frame with average thickness of 5 µ.
Telaio verniciato con polveri epossipoliesteri spessore medio di 50 µ. Telaio cromato con spessore medio 5 µ.
Bastidor con recubrimiento en polvo epoxi-poliéster con 50 µ de espesor medio. Bastidor cromado con 5 µ de espesor medio.

PKG

IMBALLO
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
82	83	113	0.77	1	20.33	