


RELIEF 4 star updown with arms  
5036-4UAP  
Design Favaretto&Partners

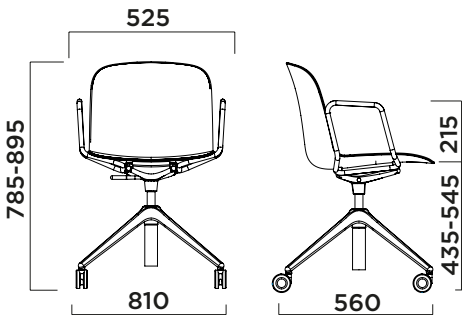

BASE AND SUPPORT

BASE E SUPPORTO  
BASE AND SUPPORT

Polished aluminium 4 star base. Painted aluminium base and support with epoxy-polyester powder with average thickness of 50  $\mu$ .  
Base a 4 razze in alluminio lucidato. Base e supporto in alluminio verniciato a polvere epossipoliestere con spessore medio di 50  $\mu$ .  
Base de aluminio pulido de 4 radios Base y soporte de aluminio con recubrimiento en polvo epoxi-poliéster con 50  $\mu$  de espesor medio.



00L



30



31



S020



R8022



S007



S503



S514



S529



R6013

SHELL

SCocca  
CARCASA

SUPPORT

SUPPORTO  
SOPORTE

Polished die casting aluminium  
Alluminio presso fuso pulito.  
Aluminio fundido a presión pulido

GAS COLUMN

COLONNA A GAS  
PISTÓN DE GAS

Gas column Ø 50.  
Cononna a gas Ø  
Pistón de gas Ø 50.

CASTORS

RUOTE  
RUEDAS PIVOTANTES


Perforated castors diam. 60 stem 11.  
Ruote forate diametro 60 perno 11.  
Ruedas pivotantes perforadas diám. 60 perno 11.

PKG

IMBALLO  
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
59	63	85,5	0.32	1	12,82	

RELIEF 4 star updown with arms upholstered seat panel  
5036-4UAS  
Design Favaretto&Partners

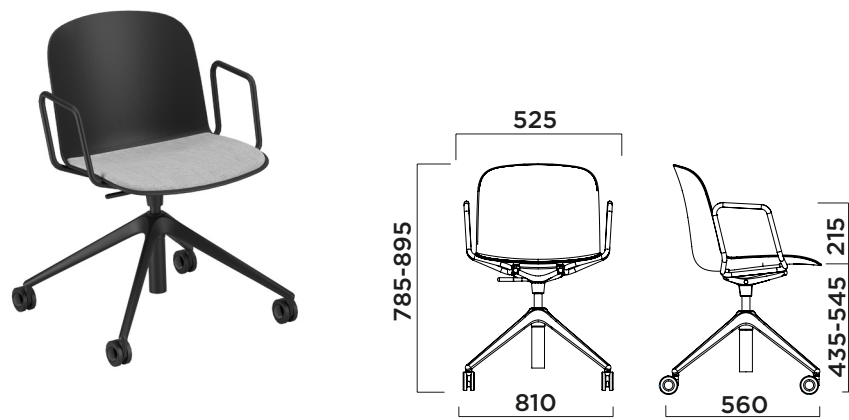

BASE AND SUPPORT  
BASE E SUPPORTO  
BASE AND SUPPORT

Polished aluminium 4 star base  
Base 4 razze alluminio pulito.  
Base de aluminio pulido de 4 radios



SHELL  
SCocca  
CARCASA

Polypropylene + Glass fiber  
Polipropilene + Fibra di vetro  
Polipropileno + Fibra de vidrio



UPHOLSTERY  
TAPPEZZERIA  
TAPIZADOS

Upholstered seat panel  
Upholstered seat panel  
Upholstered seat panel

- A Space, Panarea
- B Eco Leather
- C Convert D, Velvety, Step, Step Melange, Nuvole
- D Reflect
- E Field, Oceanic , Yoredale
- F Steelcut Quartet, Canvas2
- G Divina3, Divina Melange, Fiord
- H Full Leather

COM Fabric(m)	COM Leather(m2)
0,65	0,50


FEATURES  
CARATTERISTICHE  
CARACTERÍSTICAS

Painted aluminium base and support with epoxy-polyester powder with average thickness of 50 µ.  
Base e supporto in alluminio verniciato a polvere epossipoliéster con spessore medio di 50 µ.  
Base y soporte de aluminio con recubrimiento en polvo epoxi-poliéster con 50 µ de espesor medio.

PKG  
IMBALLO  
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
59	63	85,5	0.32	1	12,82	

RELIEF 4 star updown with arms fully upholstered  
5036-4UAT  
Design Favaretto&Partners

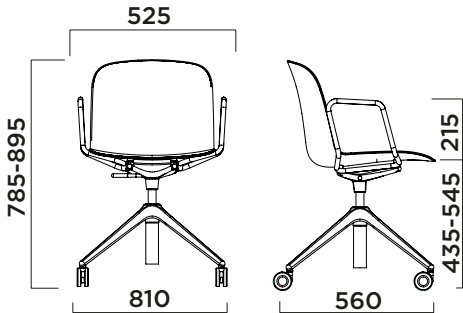

BASE AND SUPPORT

BASE E SUPPORTO  
BASE AND SUPPORT

Polished aluminium 4 star base. Painted aluminium base and support with epoxy-polyester powder with average thickness of 50 µ.  
Base a 4 razze in alluminio lucidato. Base e supporto in alluminio verniciato a polvere epossipoliestere con spessore medio di 50 µ.  
Base de aluminio pulido de 4 radios Base y soporte de aluminio con recubrimiento en polvo epoxi-poliéster con 50 µ de espesor medio.



UPHOLSTERY

TAPPEZZERIA  
TAPIZADOS

Full upholstered shell  
Full upholstered shell  
Full upholstered shell

A Space,Panarea  
B Eco Leather  
C Convert D,Velvety,Step, Step Melange, Nuvole  
D Reflect   
E Field, Oceanic , Yoredale  
F Steelcut Quartet,Canvas2  
G Divina3, Divina Melange, Fiord  
H Full Leather

COM Fabric(m)	COM Leather(m2)
1.00	1.40

SUPPORT

SUPPORTO  
SOPORTE

Polished die casting aluminium  
Alluminio presso fuso pulito.  
Aluminio fundido a presión pulido

GAS COLUMN

COLONNA A GAS  
PISTÓN DE GAS

Gas coloum Ø 50.  
Cononna a gas Ø  
Pistón de gas Ø 50.

CASTORS

RUOTE  
RUEDAS PIVOTANTES

Perforated castors diam. 60 stem 11.  
Ruote forate diametro 60 perno 11.  
Ruedas pivotantes perforadas diám. 60 perno 11.

PKG

IMBALLO  
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
59	63	85,5	0.32	1	12,82	