



RELIEF sled kitchen stool
5036-SKSP
Design Favaretto&Partners

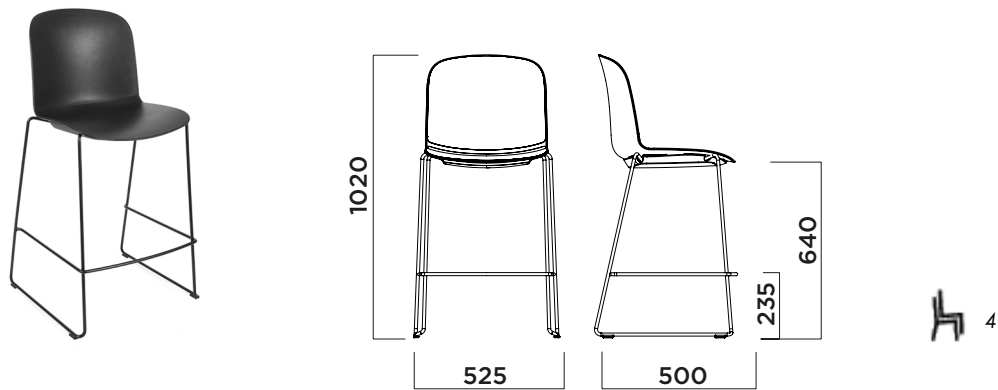

<div>FRAME</div> <div>TELAIO</div> <div>BASTIDOR</div>	<div>Metal frame in drawn rod diameter 11 mm – Fe360.</div> <div>Telaio in tondino Diametro 11 mm - Fe360.</div> <div>Bastidor metálico de varilla de 11 mm de diámetro - Fe360</div> <div><div><div></div><div>30</div></div><div><div></div><div>31</div></div><div><div></div><div>79</div></div><div><div></div><div>6013F</div></div><div><div></div><div>01</div></div></div>													
<div>SHELL</div> <div>SCocca</div> <div>CARCASA</div>	<div>Polypropylene + Glass fiber.</div> <div>Polipropilene + Fibra di vetro</div> <div>Polipropileno + Fibra de vidrio.</div> <div><div><div></div><div>S020</div></div><div><div></div><div>R8022</div></div><div><div></div><div>S007</div></div><div><div></div><div>S503</div></div><div><div></div><div>S514</div></div><div><div></div><div>S529</div></div><div><div></div><div>R6013</div></div></div>													
<div>FEATURES</div> <div>CARATTERISTICHE</div> <div>CARACTERÍSTICAS</div>	<div>Painted frame with epoxy-polyester powder with average thickness of 50 μ. Chromed frame with average thickness of 5 μ.</div> <div>Telaio verniciato con polveri epossi-poliesteri spessore medio di 50 μ. Telaio cromato con spessore medio 5 μ.</div> <div>Bastidor con recubrimiento en polvo epoxi-poliéster con 50 μ de espesor medio. Bastidor cromado con 5 μ de espesor medio.</div>													
<div>PKG</div> <div>IMBALLO</div> <div>EMBALAJE</div>	<table><tr><th>Pkg</th><th>A(cm)</th><th>B(cm)</th><th>h(cm)</th><th>MC</th><th>PCS</th><th>Weight (kg)</th></tr><tr><td>59</td><td>63</td><td>108,5</td><td>0.4</td><td>2</td><td>15,4</td></tr></table>	Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)	59	63	108,5	0.4	2	15,4
Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)								
59	63	108,5	0.4	2	15,4									

RELIEF sled kitchen stool upholstered seat panel
5036-SKSS
Design Favaretto&Partners

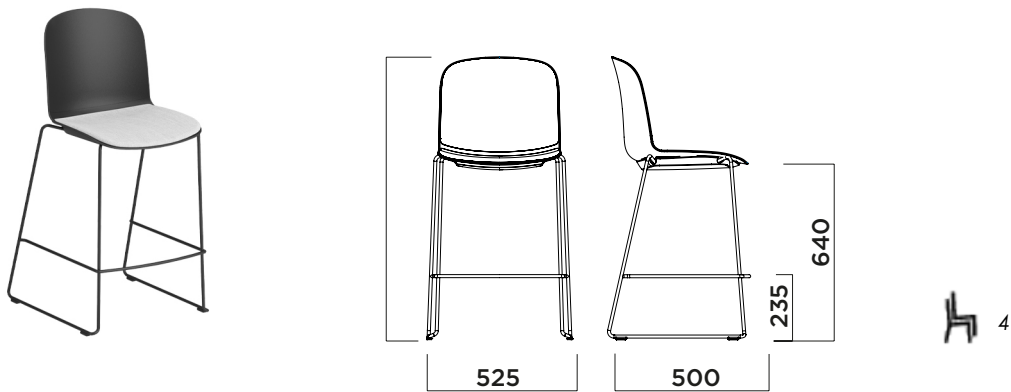

FRAME

TELAIO
BASTIDOR

Metal frame in round tube diameter 16 mm, thickness 2 mm, accordingly UNI EN 10305-3 rule in Asform.
Struttura in tubo tondo diametro 16 mm, spessore 2 mm, secondo norma UNI EN 10305-3 in Asform.
Bastidor metálico de tubo redondo de 16 mm de diámetro y 2 mm de espesor, conforme a la norma UNI EN 10305-3 en Asform



SHELL

SCOCCA
CARCASA

Polypropylene + Glass fiber.
Polipropilene + Fibra di vetro
Polipropileno + Fibra de vidrio.



UPHOLSTERY

TAPPEZZERIA
TAPIZADOS

Upholstered seat panel
Upholstered seat panel
Upholstered seat panel

- A Space, Panarea
- B Eco Leather
- C Convert D, Velvety, Step, Step Melange, Nuvole
- D Reflect
- E Field, Oceanic , Yoredale
- F Steelcut Quartet, Canvas2
- G Divina3, Divina Melange, Fiord
- H Full Leather

COM Fabric(m)	COM Leather(m2)
0.65	0.50

FEATURES

CARATTERISTICHE
CARACTERÍSTICAS


Painted frame with epoxy-polyester powder with average thickness of 50 μ. Chromed frame with average thickness of 5 μ.
Telaio verniciato con polveri epossipoliester spessore medio di 50 μ. Telaio cromato con spessore medio 5 μ.
Bastidor con recubrimiento en polvo epoxi-poliéster con 50 μ de espesor medio. Bastidor cromado con 5 μ de espesor medio.

PKG

IMBALLO
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
59	63	108,5	0.4	2	15,4	

RELIEF sled kitchen stool fully upholstered
5036-SKST
Design Favaretto&Partners

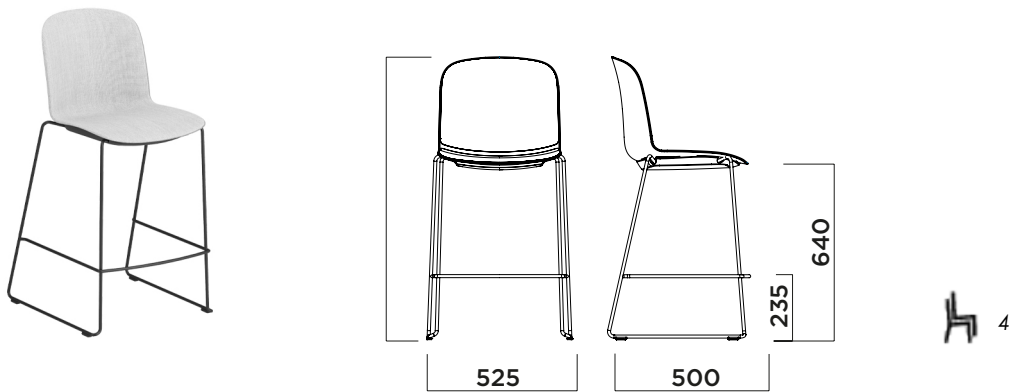

FRAME

TELAIO
BASTIDOR

Metal frame in round tube diameter 16 mm, thickness 2 mm, accordingly UNI EN 10305-3 rule in Asform.
Struttura in tubo tondo diametro 16 mm, spessore 2 mm, secondo norma UNI EN 10305-3 in Asform.
Bastidor metálico de tubo redondo de 16 mm de diámetro y 2 mm de espesor, conforme a la norma UNI EN 10305-3 en Asform



UPHOLSTERY

TAPPEZZERIA
TAPIZADOS

Full upholstered shell
Full upholstered shell
Full upholstered shell

- A Space, Panarea
- B Eco Leather
- C Convert D, Velvety, Step, Step Melange, Nuvole
- D Reflect
- E Field, Oceanic, Yoredale
- F Steelcut Quartet, Canvas2
- G Divina3, Divina Melange, Fiord
- H Full Leather

COM Fabric(m)	COM Leather(m2)
1,00	1.40

FEATURES

CARATTERISTICHE
CARACTERÍSTICAS

Painted frame with epoxy-polyester powder with average thickness of 50 µ. Chromed frame with average thickness of 5 µ.
Telaio verniciato con polveri epossipoliesteri spessore medio di 50 µ. Telaio cromato con spessore medio 5 µ.
Bastidor con recubrimiento en polvo epoxipoliéster con 50 µ de espesor medio. Bastidor cromado con 5 µ de espesor medio.

PKG

IMBALLO
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
59	63	108,5	0.4	2	15,4	