


RELIEF swivel with castors with arms
5036-4CAP
Design Favaretto&Partners

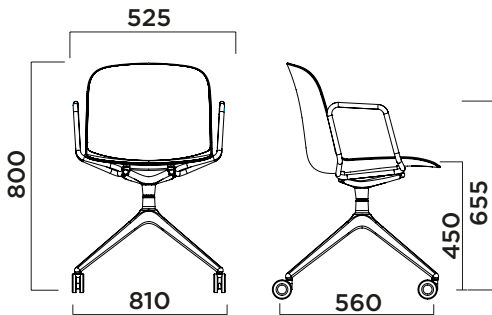

BASE AND SUPPORT

BASE E SUPPORTO
BASE AND SUPPORT

Polished aluminium 4 star base
Base 4 razze alluminio pulito.
Base de aluminio pulido de 4 radios



SHELL

SCOCCA
CARCASA

Polypropylene + Glass fiber
Polipropilene + Fibra di vetro
Polipropileno + Fibra de vidrio



SUPPORT

SUPPORTO
SOPORTE

Polished die casting aluminium
Alluminio presso fuso pulito.
Aluminio fundido a presión pulido

CASTORS

RUOTE
RUEDAS PIVOTANTES

Perforated castors diam. 60 stem 11.
Ruote forate diametro 60 perno 11.
Ruedas pivotantes perforadas diám. 60 perno 11.

FEATURES

CARATTERISTICHE
CARACTERÍSTICAS

Painted aluminium base and support with epoxy-polyester powder with average thickness of 50 µ.
Base e supporto in alluminio verniciato a polvere epossipoliéster con spessore medio di 50 µ.
Base y soporte de aluminio con recubrimiento en polvo epoxi-poliéster con 50 µ de espesor medio.

PKG


IMBALLO
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
59	63	85,5	0.32	1	12,82	

RELIEF swivel with castors with arms upholstered seat panel

5036-4CAS

Design Favaretto&Partners

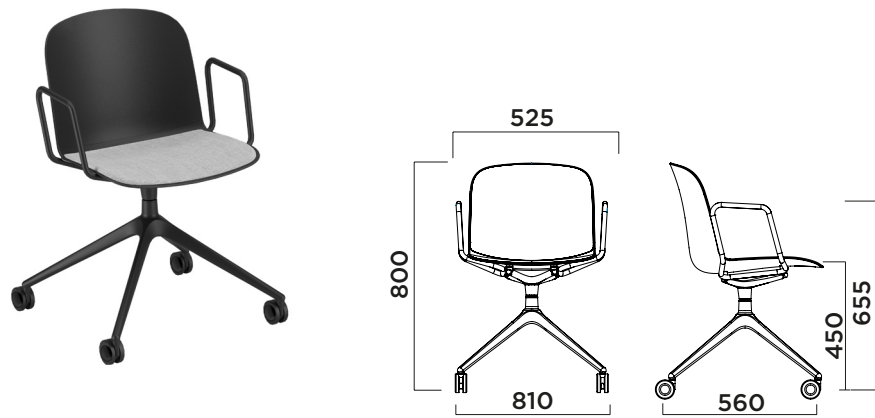

BASE AND SUPPORT

BASE E SUPPORTO

BASE AND SUPPORT

Polished aluminium 4 star base

Base 4 razze alluminio pulito.

Base de aluminio pulido de 4 radios



00L



30



31

SHELL

SCOCCA

CARCASA

Polypropylene + Glass fiber

Polipropilene + Fibra di vetro

Polipropileno + Fibra de vidrio



S020



R8022



S007



S503



S514



S529



R6013

UPHOLSTERY

TAPPEZZERIA

TAPIZADOS

Upholstered seat panel

Upholstered seat panel

Upholstered seat panel

- A** Space,Panarea
B Eco Leather
C Convert D,Velvet,Step, Step Melange, Nuvole
D Reflect
E Field, Oceanic , Yoredale
F Steelcut Quartet,Canvas2
G Divina3, Divina Melange, Fiord
H Full Leather

COM Fabric(m) COM Leather(m2)

0,65

0.50

FEATURES

CARATTERISTICHE

CARACTERÍSTICAS

Painted aluminium base and support with epoxy-polyester powder with average thickness of 50 µ.

Base e supporto in alluminio verniciato a polvere epossipoliéster con spessore medio di 50 µ

Base y soporte de aluminio con recubrimiento en polvo epoxi-poliéster con 50 µ de espesor medio.


PKG

IMBALLO

EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
59	63	85,5	0.32	1	12,82	

RELIEF swivel with castors with arms fully upholstered
5036-4CAT
Design Favaretto&Partners

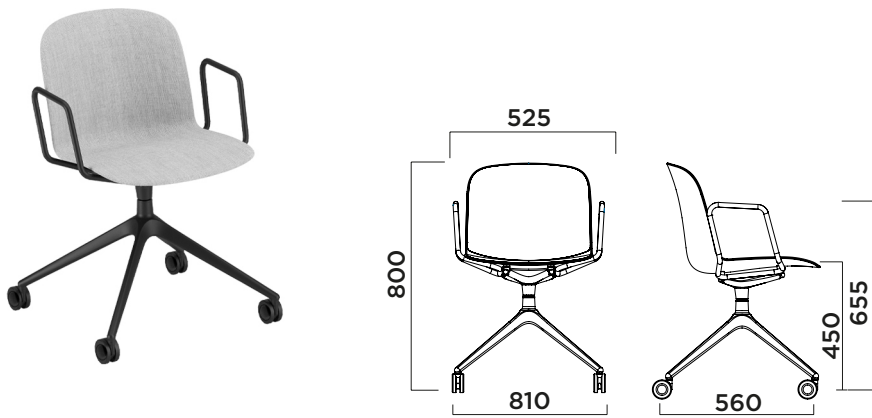

BASE AND SUPPORT
BASE E SUPPORTO
BASE AND SUPPORT

Polished aluminium 4 star base
Base 4 razze alluminio pulito.
Base de aluminio pulido de 4 radios



UPHOLSTERY
TAPPEZZERIA
TAPIZADOS

Full upholstered shell
Full upholstered shell
Full upholstered shell

- A Space,Panarea
- B Eco Leather
- C Convert D,Velvety,Step, Step Melange, Nuvole
- D Reflect
- E Field, Oceanic , Yoredale
- F Steelcut Quartet,Canvas2
- G Divina3, Divina Melange, Fiord
- H Full Leather

COM Fabric(m)	COM Leather(m2)
1.00	1.40

SUPPORT
SUPPORTO
SOPORTE

Polished die casting aluminium
Alluminio presso fuso pulito.
Aluminio fundido a presión pulido

CASTORS
RUOTE
RUEDAS PIVOTANTES

Perforated castors diam. 60 stem 11.
Ruote forate diametro 60 perno 11.
Ruedas pivotantes perforadas diám. 60 perno 11.

FEATURES
CARATTERISTICHE
CARACTERÍSTICAS

Painted aluminium base and support with epoxy-polyester powder with average thickness of 50 µ.
Base e supporto in alluminio verniciato a polvere epossipoliestere con spessore medio di 50 µ
Base y soporte de aluminio con recubrimiento en polvo epoxi-poliéster con 50 µ de espesor medio.

PKG
IMBALLO
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
59	63	85,5	0.32	1	12,82	