


SKOL
5102-4LGP / 5102-O4LP
Design Needs Studio

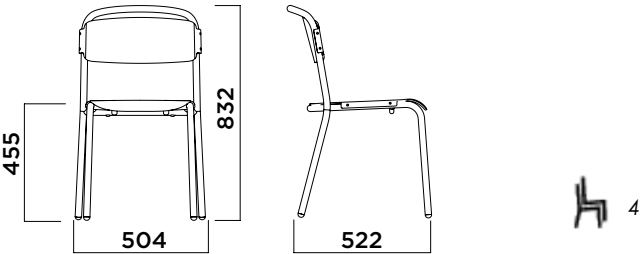

FRAME

TELAIO
BASTIDOR

Round tube diameter 25 mm, thickness 1.5 mm, accordingly Uni En 10305-3
Struttura in tubo tondo diametro 25 mm, spessore 2 mm, secondo norma UNI EN10305-3.
Tubo redondo de 25 mm de diámetro, 2 mm de espesor, conforme a la norma UNI EN 10305-3.



OUTDOOR FRAME

TELAIO OUTDOOR
BASTIDOR PARA
EXTERIORES

Epoxy-polyester powder painted frame for outdoor, average thickness 50 µ.
Telaio per esterno verniciato a polveri epossipoliestere spessore medio 50 µ.
Estructura pintada epoxy para exteriores, espesor medio de 50 µ.



SEAT AND BACKREST

SEDUTA E SCHIENALE
ASIENTO Y RESPALDO

Post consumer industrial Polypropylene + Glass Fiber
Plastica post consumo industriale + Fibra di vetro
Plástico industrial posconsumo + Fibra de vidrio



Polypropylene + Glass Fiber
Polipropilene + Fibra di vetro
Polipropileno + Fibra de vidrio



FINISHING

FINITURA
ACABADO

Painted frame with epoxy-polyester powder with average thickness of 50 µ. Chrome plated frame with average thickness of 5 µ.
Telaio verniciato con polveri epossi-poliestere spessore medio di 50 µ. Telaio cromato con spessore medio 5 µ.
Bastidor con recubrimiento en polvo epoxi-poliéster con 50 µ de espesor medio. Bastidor cromado con 5 µ de espesor medio

PKG

IMBALLO
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
71	59	102.5	0.43	4	24	