

# EASY sit-stand desks



## FEATURES

- Equipped with two motors
- Two types of lifting columns - Linak DL15 and Linak DL16
- Telescopic frame
- Two types of feet to choose from

## QUALITY STANDARD

- LST EN 527-1:2011
- LST EN 527-2:2002
- LST EN 527-3:2003
- ISO 21016:2007

## TECHNICAL INFORMATION

### Desktop

- 25 mm MFC (melamine) with 2 mm ABS edging;
- With or without a cut-out for grommet and wire management.
- With or without a scallop for wire management.

### Adjustable telescopic frame

- L-shaped angle dimensions: 40x40x534 mm; 50x30x460 mm;
- Adjustment range - 600 mm;
- Steel stripe for adjustment - 35x4x910 mm;
- Powder coated metal, matches the colour of columns and feet.

### Lifting columns

- Types: two(2) or three(3) steps columns;
- Anticollision feature (only in three(3) steps columns);
- Two motors;
- Soft start and soft stop;
- Lifting speed: up to 38 mm/ sec;
- Stroke length: DL15/ DL16 – 500/ 650 mm;
- Rectangular tube dimensions: DL15/ DL16 – 43,5x73,5, 37x67 mm/ 50x80 mm, 43,5x73,5, 37x67 mm;
- Lifting capacity: 80 kg;
- Powder coated metal, matches the colour of frame and feet.


### Types of feet



#### Type W

- Metal sheet 700x70x30 mm with welded profile for stability;
- Height - 30 mm;
- Plastic feet with height levelling (+10 mm);
- Powder coated metal; matches the colour of frame.


### Height adjustment button types

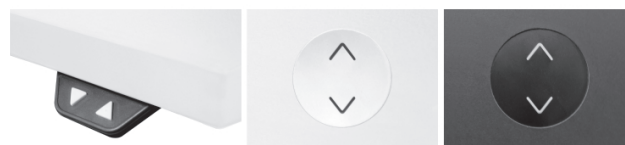

BA

TE

TA



MA

LA

### Types of columns



DL15 (2)

DL16 (3)



#### Type I

- Metal tube – 796x60x30 mm;
- Plastic feet with height levelling (+10 mm);
- Powder coated metal; matches the colour of frame.

## ELECTRICAL SPECIFICATION

### Electronic data power unit

- Input: 110-240 V;
- Frequency: 50/60 Hz;
- Output: 18 V;
- Power Plug: 2-pol;
- Energy consumption: standby 0,01 W;
- Operating Cycle: 1 minute on, 9 minutes off.







## MATERIALS

- Melamine: M1 (white), P (birch), T (beech), D1 (whitened oak), D2 (amber oak), U (walnut), N (grey);
- Metal: E (white), M (metallic), A (black).

## GUARANTEE

- 5 years


## RANGE



W 1170-1770  
D 700,800  
H 680-1180



W 1170-1770  
D 1368  
H 680-1180





W 1170-1770  
D 700,800  
H 585-1235



W 1170-1770  
D 1368  
H 585-1235

## ORDERING EXAMPLE

### Code structure

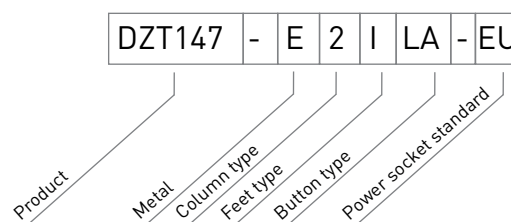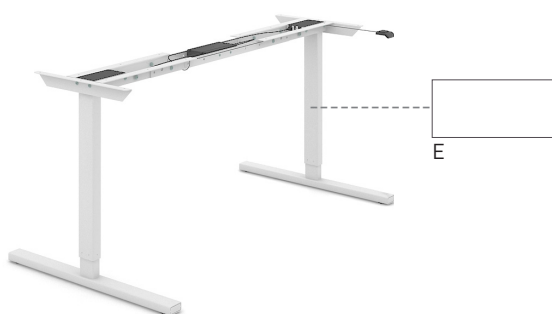

### Must be ordered

(for desktops with cut-out)



Metal grommet:  
317x119 mm, H=27 mm

### Optional



Cable trays




Power socket blocks



Cable ducts



Screens



Felt-lined metal  
drawer with lock



App control via Bluetooth  
(iOS, Android)