

# ACOUSTIC ARTWORK

Technical information

narbutas.com



# Quality and standards

ISO 11654

## 10 year Warranty

See Warranty statement


Set of suspensions  
G6F0464

PET felt acoustic  
partition



Set of suspensions  
G6F0506

PET felt acoustic  
panel for ceiling

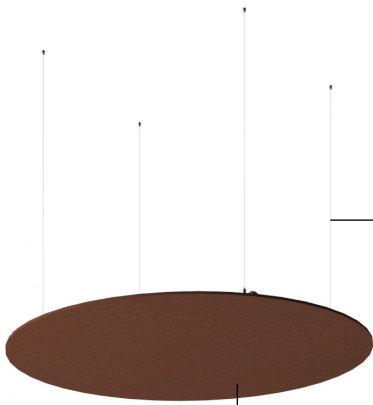


Set of suspensions  
G6F0465

PET felt  
acoustic cloud



Metal frame and  
fittings for baffles

PET felt  
acoustic baffle

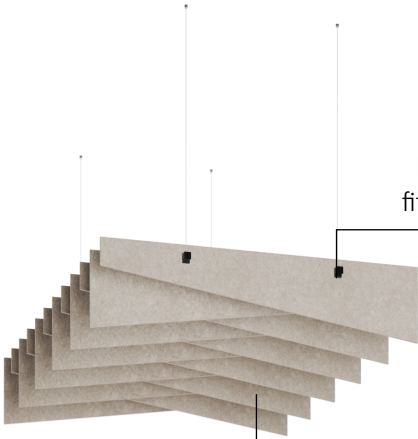

# Technical information


## Types

- ACOUSTIC ARTWORK Partitions (1)
- ACOUSTIC ARTWORK Ceiling (2)
- ACOUSTIC ARTWORK Wall (3)
- ACOUSTIC ARTWORK Accessories (4)

1



2



3



4



## ACOUSTIC ARTWORK Partitions

### Screen composition

- PET fiber board 9 mm.

### Set of suspensions G6F0464 (2 pcs.)

- Suitable only for PET partitions (up to 10 mm thick);
- Only a single product can be suspended per set;
- Set includes ceiling mounting (masonry/wood/gypsum);
- Adjustable cable gripper;
- Ø1,5 mm wire rope L-50-2000 mm.

### Set of suspensions G6F0467 (2 pcs.)

- Suitable only for PET partitions (up to 10 mm thick);
- Only a single product can be suspended per set;
- Set includes ceiling mounting (for T24 Armstrong profile);
- Adjustable cable gripper;
- Ø1,5 mm wire rope L-50-2000 mm.

## ACOUSTIC ARTWORK Ceiling

### Options

- PET felt acoustic cloud
- PET felt acoustic panel for ceiling
- PET felt acoustic baffle

### PET panel composition

- PET fiber board 9 mm.

### Set of suspensions G6F0465 (1 pc.), only for PET felt clouds

- Only a single product can be suspended per set;
- Set includes ceiling mounting (masonry/wood/gypsum);
- Ø1,5 mm wire rope L-50-2000 mm;
- Adjustable cable gripper;
- Two Ø1,5 mm wire ropes with metal plates L-1500 mm.

### Set of suspensions G6F0466 (1 pc.), only for PET felt clouds

- Suitable only for PET clouds;
- Only a single product can be suspended per set;
- Set includes ceiling mounting (for T24 Armstrong profile);

- Ø1,5 mm wire rope L-50-2000 mm;
- Adjustable cable gripper;
- Two Ø1,5 mm wire ropes with metal plates L-1500 mm.

### Set of suspensions G6F0506 (4 pcs.), only for ceiling PET acoustic panels

- Only a single product can be suspended per set;
- Set included ceiling mounting (masonry/wood/gypsum);
- Ø 1,2 mm wire rope L-50-3000 mm;
- Adjustable cable gripper.

### Metal frame and fittings for baffles

- Metal frame made of 20x20 mm metal tube;
- Powder-coated metal.

## ACOUSTIC ARTWORK Wall

### PET panel composition

- PET fiber board 9 mm.

### Adhesive for wall panels

- Must be bought separately;
- Virtually odourless;
- Non staining;
- Optimal application temperature +5°C until +35°C;
- Adhesive fittings for wall or ceiling (glass/wood/plastic/ceramics/varnished surfaces)\*.

## ACOUSTIC ARTWORK Accesories

### Options

- PET felt free-standing desk screen
- PET felt basket

### PET panel composition


- PET fiber board 9 mm.

\*The adhesive must flow onto the surface and create full surface contact. The surface to be bond must be free of grease, loose particles, and moisture.


# Range

## ACOUSTIC ARTWORK Partitions


PET felt acoustic partition pattern types




ZB00 PLAIN




ZB10 DOT




ZB20 HEX




ZB30 FLOW




ZB40 DISCO




ZB50 GRATE

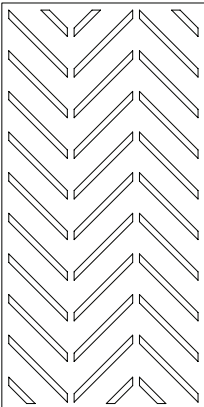


ZB60 CHEVRON

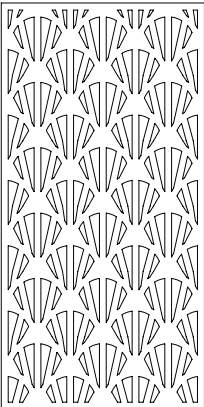


ZB70 CLAMS

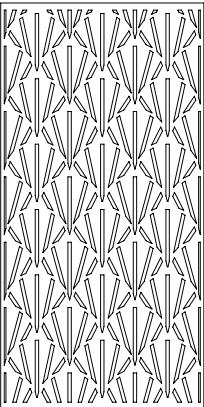

ZB80 REVERSE CLAMS

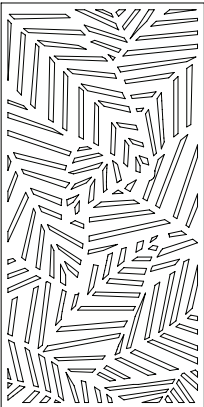


ZB90 PALMS

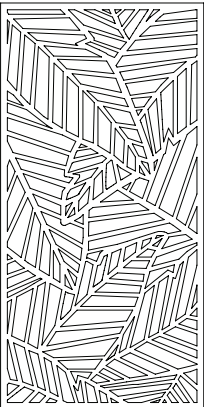

ZC10 REVERSE PALMS

### Sizes




800, 1200

2000, 2400


ACOUSTIC ARTWORK Wall

PET felt tile pattern types


Square

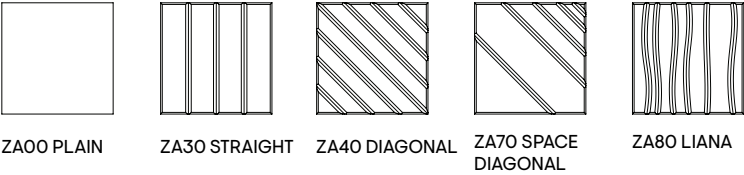

Rectangle

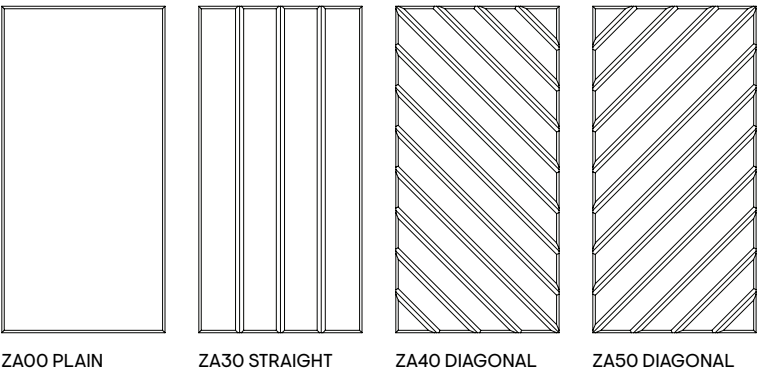

Triangle

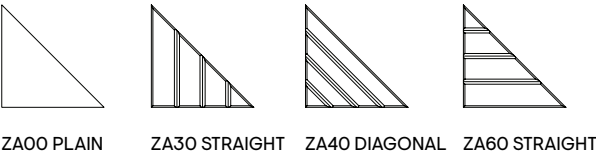


Hexagon



Diamond




Sizes


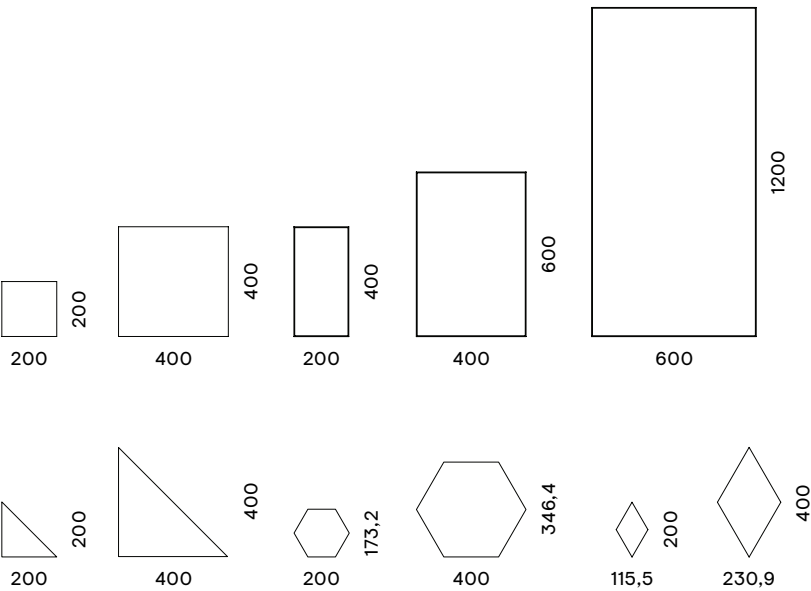


ACOUSTIC ARTWORK Ceiling

PET felt acoustic cloud



Sizes



PET felt acoustic baffle types

Plain





Blade



Wave




Sizes

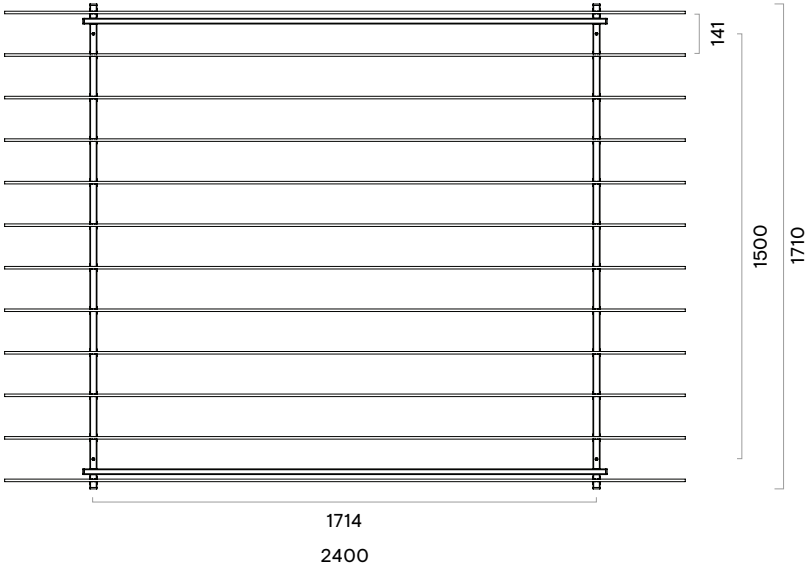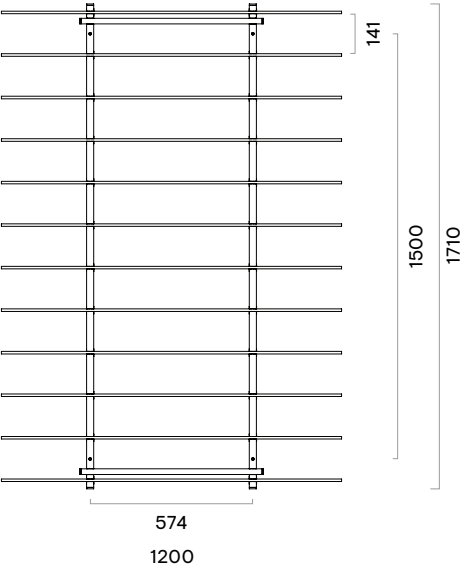




PET felt acoustic panel for ceiling pattern types

Square




ZA00 PLAIN




ZA30 STRAIGHT

Rectangle




ZA00 PLAIN




ZA30 STRAIGHT

Round








ZA00 PLAIN





ZA30 STRAIGHT

Sizes




ACOUSTIC ARTWORK Accessories

PET felt free-standing desk screen

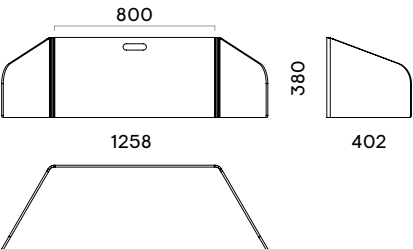

PET felt basket





---


## Additional information

- Slight PET Felt color deviations can occur due to use of recycled material in the production of the product.
- Some undyed fibers may be present on the surface of the product.
- To ensure smooth and easy assembly PET partitions are delivered without holes for fittings. This is done in order to mitigate any problems which may hinder assembly such as placement of ducting, lighting or internal building constructions.

---

!




Only one way of PET Cloud suspension is allowed. Suspending product incorrectly may lead to product damage or people injury.



---

!

PET partition patterns were designed for vertical use. Although it is not forbidden to suspend this product horizontally, we cannot guarantee performance and aesthetic look of the partition.



---

!

Please note that due to the size and shape of the PET Tiles not every Tile can be combined to create a uniform composition.



! \_\_\_\_\_

Glueing example



Adhesive consumption

Length of the product	Depth of the product	Area of the product, m2	The length of the adhesive strip around the perimeter and diagonally for the product, m	Consumption of glue bottles per product	Consumption of glue bottles, m2	Yield of glue bottle, m2
200	200	0,04	0,5	0,0	1,23	1,9
400	400	0,16	1,1	0,1	0,61	
200	400	0,08	0,6	0,1	0,70	
400	600	0,24	1,2	0,1	0,43	
600	1200	0,72	1,9	0,2	0,23	
200	200	0,04	0,5	0,0	1,23	
400	400	0,16	1,1	0,1	0,61	
173	200	0,03	0,5	0,0	1,25	
346	400	0,13	1,0	0,1	0,62	
762	334	0,25	1,9	0,2	0,69	
762	684	0,52	2,0	0,2	0,35	
762	1038	0,79	2,2	0,2	0,24	
762	1389	1,05	2,3	0,2	0,19	
962	334	0,32	2,4	0,2	0,68	
962	684	0,65	2,5	0,2	0,34	
962	1038	0,99	2,6	0,2	0,23	
962	1389	1,33	2,8	0,3	0,18	
1162	334	0,38	2,9	0,3	0,68	
1162	684	0,79	3,0	0,3	0,34	
1162	1038	1,20	3,1	0,3	0,23	
573	1389	0,79	1,9	0,2	0,21	
1562	334	0,52	3,9	0,4	0,68	
1562	684	1,06	4,0	0,4	0,33	
772	1038	0,80	2,2	0,2	0,24	
772	1389	1,07	2,3	0,2	0,19	