

TECHNICAL CHARACTERISTICS

SCLPABN

# Clip




## Chair

Beauty and comfort in the minimum space. Taking advantage of space has become a need... the Clip chair respects this maxim, brings beauty, functionality and comfort all together, with a screened, flexible fabric back.

DESIGNED BY ONDARRETA TEAM



**ondarreta**

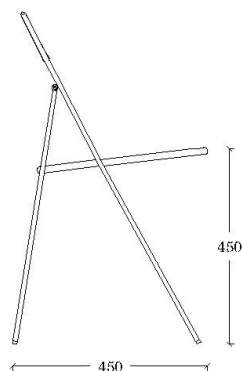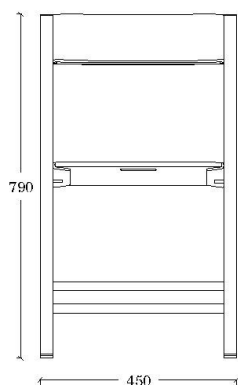

## DIMENSIONS

45 cm x 45 cm x 79 cm x 45 cm (17,7" x 17,7" x 31,1" x 17,7") [width x depth x height x seat height]

## WEIGHT

5,6 kg (12,3 lb)

## PACKAGING

Two chairs per box, box dimensions:  
92 cm x 47 cm x 7 cm (36,2" x 18,5" x 2,8")

## CERTIFICATION

Product tested under the standard  
ANSI/BIFMA X5.1-2002

## ACCESORIES

Wall hanger

## ORIGIN

100% Fabricated in Europa

## DESIGN

Ondarreta Team

\*Minimum order: two units



## **COMPONENTS**

### **FRAME**

#### **Material**

10 x 30 mm (0,4"x 1,2" ) sides and 2 mm (0,08") thickness cold laminated rectangular E-220 quality (EN-10305 Normative) steel tube.

Tensile Strength > 310 N/mm<sup>2</sup> (44,960 psi);

Elastic Limit > 220 N/mm<sup>2</sup> (31,900 psi); Elongation > 23%

#### **Finish**

Aluminum epoxy

### **SEAT**

#### **Beech**

Beech plywood board shell, 10 mm (0.4") thick. It's made with nine especially treated sheets, glued, pressed and CNC machined.

#### **Technical characteristics:**

Urea-formol glue: low formaldehyde emission (E1 European Normative)

The wood has the PEFC certificate.

#### **Finish**

Stained or lacquered.

### **BACK**

#### **Screen**

Screen® double mesh. It's polyester and PVC made technical fabric. It has very good mechanical properties and is suitable for external use.

#### **Technical characteristics:**

Composition: 70% PVC, 30% Polyester; Thickness: 0,92 mm;

Elongation: 15-21 % (EN-ISO 1421);

Grazing resistance (Martindale method BS-5690) > 100.000 cycles;

Light resistance (Xenon) (EN-ISO 4892-2): 8th class (min=1, Max=8);

OEKO-TEX label



## **METAL FINISHES**

### **EPOXYS**

Powder covering formulated with polyester resins, with good both mechanical and chemical properties, outdoor maximum resistance and noxious compounds free. Electrostatic application and oven cured at 200°C (392°F).

#### **Technical characteristics:**

Thickness (ISO 2360): between 60 and 90 µm.

Adherence (ISO 2409): Grade: 0 (maximum adherence)





## **WOOD FINISHES**

### **STAIN**

Pigmented enamel with a transparent stain coating. Reactive drying paints: excellent adherence between layers and better mechanical resistance.

### **LACQUER**

Pigmented reactive drying lacquers.

### **Technical characteristics:**

Satisfying UNE-EN 71-3 normative; Formaldehyde free compounds.