



## Arrangements Broken Line

■ F0405030 - Black

Designed by Michael Anastassiades

Diffuse light suspended lighting device. Body in extruded, curved NC-machined and black powder-coated aluminium, diffuser in platinum optical silicone.

Each component can be connected to the power pack by means of an electrical and mechanical connection system designed for customisable product set-up.

Roses available with two powers: lamp with power under 70W and lamp with power under 190W. Class III roses also available for installations with remote power supply: "surface" version for installations on cement, "recessed" version for plasterboard ceilings.

The electronics integrated in the rose enables use of dimming systems: push, 1-10, potentiometer, DALI. In the absence of these systems, the light flow can be set with the push system included in the rose.

Cable length 2.4m





## Main specifications

<b>Mounting</b>	Suspension	<b>Lamp holder</b>	LED Module
<b>Environment</b>	Indoor dry location	<b>Dimmable</b>	Yes
<b>Light source type</b>	LED	<b>Autoprotected Lamp</b>	No
<b>Light source replaceable</b>	Replaceable (LED only) light source by a professional	<b>Number of heads</b>	1
	LED type	<b>Source Power (W)</b>	29
	<b>System Flux (lm)</b>		1200

## Optical

<b>Lighting Type</b>	Indirect, Direct
<b>Lighting distribution</b>	Symmetric
<b>CCT (K)</b>	2700
<b>Cold Beam Lighting</b>	No
<b>Extreme Cut off</b>	No

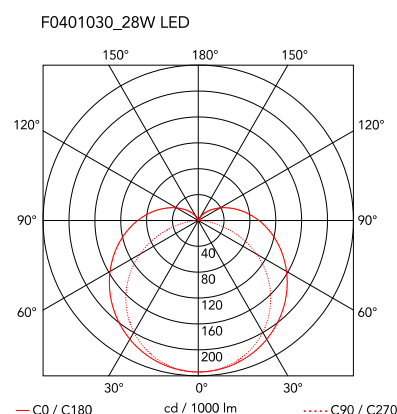

## Electrical

<b>Insulation class</b>	III	<b>Batteries Inside</b>	No
<b>Frequency (Hz)</b>	50/60	<b>Dimming Interface</b>	Remote (Dimmer Not Included)
<b>Main Voltage (Vac)</b>	48	<b>Cord length (mm)</b>	2500
<b>Driver</b>	Remote	<b>Charging Min Time</b>	No
<b>Dimmable</b>	Yes		

## Physical

<b>Colour</b>	Black
<b>Net weight (kg)</b>	0.5
<b>Gross weight (kg)</b>	1.1
<b>IP</b>	20
<b>IP external</b>	20