

RECORD BENCH
5035-4BEW
Design mC.dsg



FRAME
TELAIO
BASTIDOR

Cross-bar in round tube diameter 25 mm, thickness 1,5 mm, accordingly UNI EN 10305-3 rule.Legs in round tube diameter 40 mm, thickness 1,5 mm, accordingly UNI EN 10305-3 rule.
Traversa in tubo tondo diametro 25 mm, spessore 1,5 mm, conforme alla norma UNI EN 10305-3.Gambe in tubo tondo diametro 40 mm, spessore 1,5 mm,
Larguero de tubo redondo de 25 mm de diámetro y 1,5 mm de espesor, conforme a la norma UNI EN 10305-3. Patas de tubo redondo de 40 mm de diámetro y 1,5 mm de espesor, conforme a la norma UNI EN 10305-3.



SEAT
SEDUTA
ASIENTO

Fenix: 30mm
Fenix: 30mm
Fenix: 30mm



Heritage Oak: thickness 30mm
Heritage Oak: thickness 30mm
Heritage Oak: thickness 30mm



RFS: thickness 20mm
RFS: thickness 20mm
RFS: thickness 20mm



FINISHING
FINITURA
ACABADO


Painted steel cross-bar with epoxy-polyester powder with average thickness of 50 µ.
Traversi in acciaio verniciato con polveri epossi-poliestere spessore medio di 50 µ.
Travesaño de acero pintado con polvo epoxi-poliéster de espesor medio 50 µ.

PKG
IMBALLO
EMBALAJE

Pkg	A(mm)	B(mm)	C(mm)	PCS	Weight HPL* (kg)	Weight FX (kg)	Weight RFS* (kg)	Weight RH (kg)
380x1800	182	42	48	1	23	23	21	25
380x2200	222	42	48	1	27	27	25	29

Reproduction of this document is strictly prohibited without prior written authorisation from Omp srl. Sizes, weights and finishes may change without previous notice.
È vietata la riproduzione del seguente documento senza previa autorizzazione scritta da parte di Omp srl. Dimensioni, pesi e finiture possono variare senza alcun preavviso.
La reproducción de este documento está estrictamente prohibida sin la autorización previa de Omp srl. Los tamaños, pesos y acabados pueden cambiar sin previo aviso.

RECORD BENCH wooden legs
5035-4BWW
Design mC.dsg

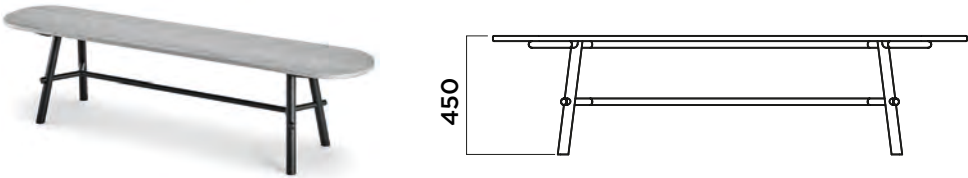

FRAME

TELAIO
BASTIDOR

Solid oak legs.
Solid oak legs.
Solid oak legs.



SEAT

SEDUTA
ASIENTO

Heritage Oak: thickness 30mm
Heritage Oak: thickness 30mm
Heritage Oak: thickness 30mm



RFS: thickness 20mm
RFS: thickness 20mm
RFS: thickness 20mm



FINISHING

FINITURA
ACABADO


Painted steel cross-bar with epoxy-polyester powder with average thickness of 50 µ.
Traversi in acciaio verniciato con polveri epossipoliester
spessore medio di 50 µ.
Travesaño de acero pintado con polvo epoxi-poliéster de espesor medio 50 µ.

PKG

IMBALLO
EMBALAJE

Pkg	A(mm)	B(mm)	C(mm)	PCS	Weight FX (kg)	Weight RH (kg)
380x1800	182	42	48	1	20	18
380x2200	222	42	48	1	24	22

RECORD BENCH upholstered panel
5035-4BET
Design mC.dsg

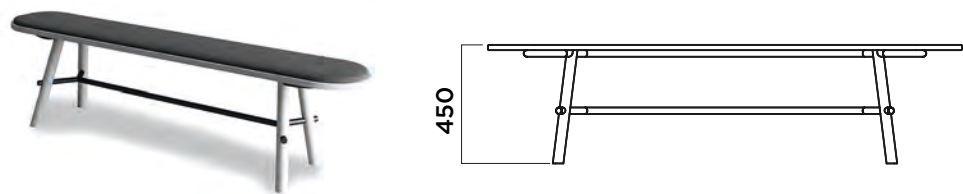

FRAME

TELAIO
BASTIDOR

Cross-bar in round tube diameter 25 mm, thickness 1,5 mm, accordingly UNI EN 10305-3 rule.Legs in round tube diameter 40 mm, thickness 1,5 mm,
Traversa in tubo tondo diametro 25 mm, spessore 1,5 mm, conforme alla norma UNI EN 10305-3.Gambe in tubo tondo diametro 40 mm, spessore 1,5 mm,
Larguero de tubo redondo de 25 mm de diámetro y 1,5 mm de espesor, conforme a la norma UNI EN 10305-3. Patas de tubo redondo de 40 mm de diámetro y 1,5 mm de espesor.



SEAT



SEDUTA
ASIENTO

RFS: thickness 20mm
RFS: thickness 20mm
RFS: thickness 20mm



UPHOLSTERY

TAPPEZZERIA
TAPIZADOS

- A Space,Panarea
- B Eco Leather
- C Convert D,Velvet,Step, Step Melange, Nuvole,Norfolk
- D Revive ,Reflect 
- E Oceanic ,Yoredale
- F Steelcut Quartet,Canvas2
- G Divina3, Divina Melange, Fiord,Harald, Patio
- H Full Leather

COM Fabric(m)	COM Leather(m2)
0.70	1.00

FINISHING

FINITURA
ACABADO


Painted steel cross-bar with epoxy-polyester powder with average thickness of 50 µ.
Traversi in acciaio verniciato con polveri epossì-poliestere
spessore medio di 50 µ.
Travesaño de acero pintado con polvo epoxi-poliéster de espesor medio 50 µ.




PKG

IMBALLO
EMBALAJE

Pkg	A(mm)	B(mm)	C(mm)	PCS	
380x1800	182	42	48	1	23.5
380x2200	222	42	48	1	28

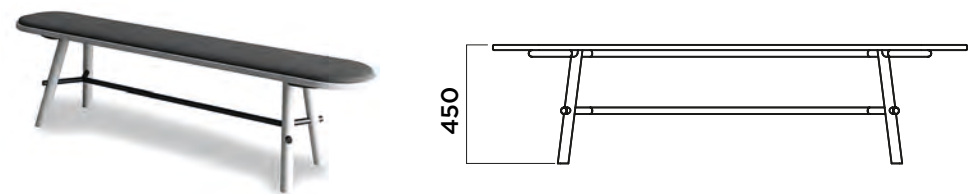RECORD BENCH wooden legs upholstered panel
5035-4BWT
Design mC.dsg



<div>FRAME</div> <div>TELAIO</div> <div>BASTIDOR</div>	<div>Solid oak legs.</div> <div>Solid oak legs.</div> <div>Solid oak legs.</div> <div><div><div></div></div><div>ROVAN</div></div> <div><div><div></div></div><div>ROTA04</div></div>																		
<div>SEAT</div> <div>SEDUTA</div> <div>ASIENTO</div>	<div>RFS: thickness 20mm</div> <div>RFS: thickness 20mm</div> <div>RFS: thickness 20mm</div> <div><div><div></div></div><div>RH03</div></div> <div><div><div></div></div><div>RH08</div></div>																		
<div>UPHOLSTERY</div> <div>TAPPEZZERIA</div> <div>TAPIZADOS</div>	<div>A Space,Panarea</div> <div>B Eco Leather</div> <div>C Convert D,Velvety,Step, Step Melange, Nuvole,Norfolk</div> <div>D Revive ,Reflect </div> <div>E Oceanic , Yoredale</div> <div>F Steelcut Quartet,Canvas2</div> <div>G Divina3, Divina Melange, Fiord,Harald, Patio</div> <div>H Full Leather</div> <div>COM Fabric(m) COM Leather(m2)</div> <div>0.70 1.00</div>																		
<div>FINISHING</div> <div>FINITURA</div> <div>ACABADO</div>	<div>Painted steel cross-bar with epoxy-polyester powder with average thickness of 50 μ.</div> <div>Traversi in acciaio verniciato con polveri epossi-poliestere</div> <div>spessore medio di 50 μ.</div> <div>Travesaño de acero pintado con polvo epoxi-poliéster de espesor medio 50 μ.</div>																		
<div>PKG</div> <div>IMBALLO</div> <div>EMBALAJE</div>	<table><tr><th>Pkg</th><th>A(mm)</th><th>B(mm)</th><th>C(mm)</th><th>PCS</th><th></th></tr><tr><td>380x1800</td><td>182</td><td>42</td><td>48</td><td>1</td><td>20.5</td></tr><tr><td>380x2200</td><td>222</td><td>42</td><td>48</td><td>1</td><td>25</td></tr></table>	Pkg	A(mm)	B(mm)	C(mm)	PCS		380x1800	182	42	48	1	20.5	380x2200	222	42	48	1	25
Pkg	A(mm)	B(mm)	C(mm)	PCS															
380x1800	182	42	48	1	20.5														
380x2200	222	42	48	1	25														

Reproduction of this document is strictly prohibited without prior written authorisation from Omp srl. Sizes, weights and finishes may change without previous notice.
È vietata la riproduzione del seguente documento senza previa autorizzazione scritta da parte di Omp srl. Dimensioni, pesi e finiture possono variare senza alcun preavviso.
La reproducción de este documento está estrictamente prohibida sin la autorización previa de Omp srl. Los tamaños, pesos y acabados pueden cambiar sin previo aviso.