


LOOP MONO 4 legs  
5088-4LGP / 5088-O4LP  
Design Claus Breinholt

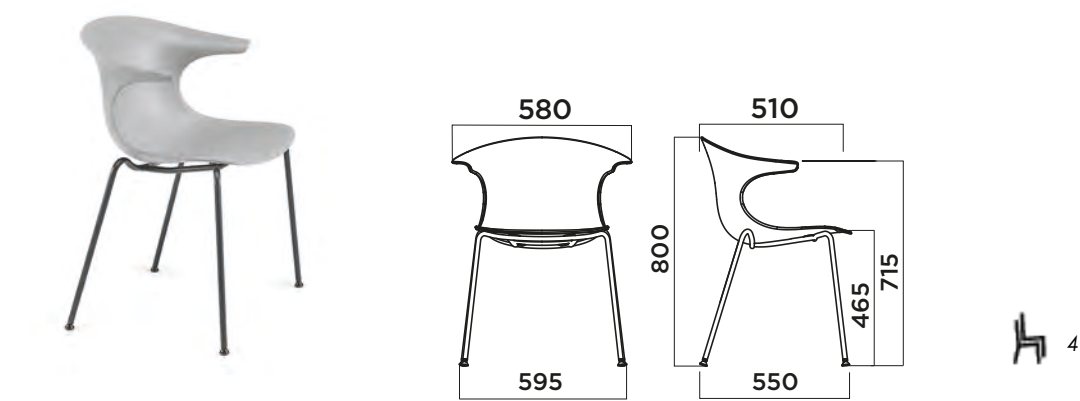

FRAME

TELAIO  
BASTIDOR


Metal frame in round tube diameter 16 mm, thickness 2 mm, accordingly with UNI EN 10305-3 rule.  
Telaio in metallo con tubo tondo di diametro 16mm, spessore 2mm, prodotto secondo la norma UNI EN 10305-3 .  
Estructura metálica en tubo redondo diámetro 16 mm, espesor 2 mm, conforme norma UNI EN 10305-3.



OUTDOOR FRAME

TELAIO OUTDOOR  
BASTIDOR PARA  
EXTERIORES

Epoxy-polyester powder painted frame for outdoor, average thickness 50 µ.  
Telaio per esterno verniciato a polveri epossipoliestere spessore medio 50 µ.  
Estructura pintada epoxy para exteriores, espesor medio de 50 µ.



SHELL

SCocca  
CARCASA

Post consumer industrial Polypropylene + Glass Fiber  
Post consumer industrial Polypropylene + Glass Fiber  
Post consumer industrial Polypropylene + Glass Fiber



Polypropylene + Glass Fiber  
Polypropylene + Glass Fiber  
Polypropylene + Glass Fiber



FINISHING

FINITURA  
ACABADO


Painted frame with epoxy-polyester powder with average thickness of 50 µ. Chromed frame with average thickness of 5 µ.  
Telaio verniciato con polveri epossi-poliestere spessore medio di 50 µ. Telaio cromato con spessore medio 5 µ.  
Bastidor con recubrimiento en polvo epoxi-poliéster con 50 µ de espesor medio. Bastidor cromado con 5 µ de espesor medio.

PKG

IMBALLO  
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
59	63	85.5	0.32	2	13.8	

LOOP MONO 4 legs upholstered seat panel  
5088-4LGS  
Design Claus Breinholt

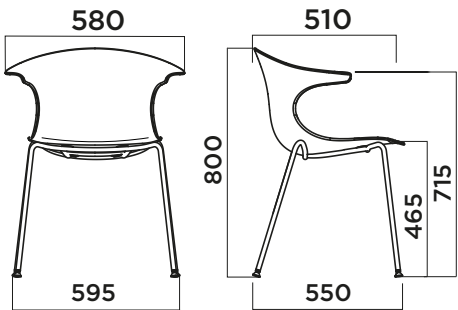

FRAME

TELAIO  
BASTIDOR

Metal frame in round tube diameter 16 mm, thickness 2 mm, accordingly with UNI EN 10305-3 rule.  
Telaio in metallo con tubo tondo di diametro 16mm, spessore 2mm, prodotto secondo la norma UNI EN 10305-3 .  
Estructura metálica en tubo redondo diámetro 16 mm, espesor 2 mm, conforme norma UNI EN 10305-3.



SHELL

SCocca  
CARCASA

Post consumer industrial Polypropylene + Glass Fiber  
Post consumer industrial Polypropylene + Glass Fiber  
Post consumer industrial Polypropylene + Glass Fiber



Polypropylene + Glass Fiber  
Polypropylene + Glass Fiber  
Polypropylene + Glass Fiber



UPHOLSTERY

TAPPEZZERIA  
TAPIZADOS

Upholstered seat panel  
Upholstered seat panel  
Upholstered seat panel

- A Space,Panarea
- B Eco Leather
- C Convert D,Velvety,Step, Step Melange, Nuvole
- D Reflect
- E Field, Oceanic, Yoredale
- F Steelcut Quartet,Canvas2
- G Divina3, Divina Melange, Fiord
- H Full Leather

COM Fabric(m)	COM Leather(m2)
0.60	0.75

FINISHING

FINITURA  
ACABADO


Painted frame with epoxy-polyester powder with average thickness of 50 µ. Chromed frame with average thickness of 5 µ.  
Telaio verniciato con polveri epossì-poliéster spessore medio di 50 µ. Telaio cromato con spessore medio 5 µ.  
Bastidor con recubrimiento en polvo epoxi-poliéster con 50 µ de espesor medio. Bastidor cromado con 5 µ de espesor medio.

PKG

IMBALLO  
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
59	63	85.5	0.32	2	13.8	

LOOP MONO 4 legs fully upholstered  
5088-4LGT  
Design Claus Breinholt

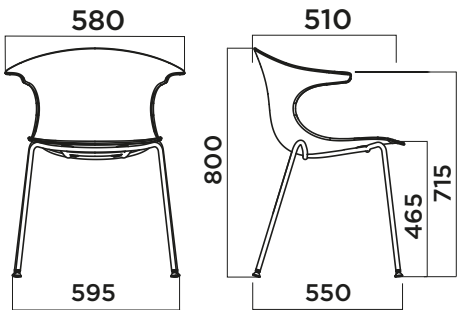

FRAME

TELAIO  
BASTIDOR

Metal frame in round tube diameter 16 mm, thickness 2 mm, accordingly with UNI EN 10305-3 rule.  
Telaio in metallo con tubo tondo di diametro 16mm, spessore 2mm, prodotto secondo la norma UNI EN 10305-3 .  
Estructura metálica en tubo redondo diámetro 16 mm, espesor 2 mm, conforme norma UNI EN 10305-3.

30	31	514F	503F	6013F	3009F	01

UPHOLSTERY

TAPPEZZERIA  
TAPIZADOS

Full upholstered shell  
Full upholstered shell  
Full upholstered shell

- A Space,Panarea
- B Eco Leather
- C Convert D,Velvety,Step, Step Melange, Nuvole
- D Reflect
- E Field, Oceanic , Yoredale
- F Steelcut Quartet,Canvas2
- G Divina3, Divina Melange, Fiord
- H Full Leather

COM Fabric(m)	COM Leather(m2)
1,10	1,70

FINISHING

FINITURA  
ACABADO

Painted frame with epoxy-polyester powder with average thickness of 50 µ. Chromed frame with average thickness of 5 µ.  
Telaio verniciato con polveri epossi-poliestere spessore medio di 50 µ. Telaio cromato con spessore medio 5 µ.  
Bastidor con recubrimiento en polvo epoxi-poliéster con 50 µ de espesor medio. Bastidor cromado con 5 µ de espesor medio.

PKG

IMBALLO  
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
59	63	85.5	0.32	2	16.8	