


PURE LOOP MONO 4 legs with arms
5034-4LCP / 5034-OA4P
Design Claus Breinholt

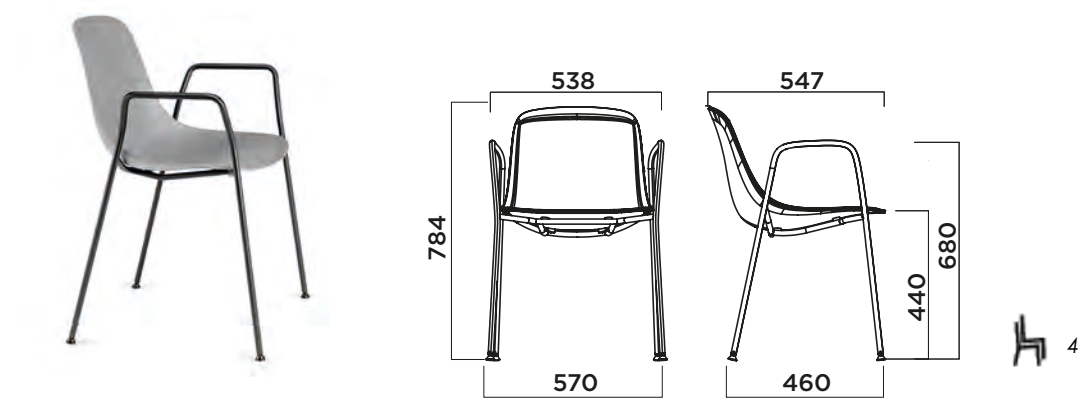

FRAME

TELAIO
BASTIDOR

Metal frame in round tube diameter 16 mm, thickness 2 mm, accordingly with UNI EN 10305-3 rule.
Telaio in metallo con tubo tondo di diametro 16mm, spessore 2mm, prodotto secondo la norma UNI EN 10305-3 .
Estructura metálica en tubo redondo diámetro 16 mm, espesor 2 mm, conforme norma UNI EN 10305-3.



OUTDOOR FRAME

TELAIO OUTDOOR
BASTIDOR PARA
EXTERIORES

Epoxy-polyester powder painted frame for outdoor, average thickness 50 µ.
Telaio per esterno verniciato a polveri epossipoliestere spessore medio 50 µ.
Estructura pintada epoxy para exteriores, espesor medio de 50 µ.



SHELL

SCocca
CARCASA

Post consumer industrial Polypropylene + Glass Fiber
Post consumer industrial Polypropylene + Glass Fiber
Post consumer industrial Polypropylene + Glass Fiber



Polypropylene + Glass Fiber
Polypropylene + Glass Fiber
Polypropylene + Glass Fiber



FINISHING

FINITURA
ACABADO


Chrome plating with medium thickness 5 µ. Painted frame with epoxy-polyester powder with average thickness of 50 µ.
Telaio cromato con spessore medio 5 µ. Telaio verniciato con polveri epossi-poliestere spessore medio 50 µ.
Cromado con 5 µ de espesor medio. Bastidor con recubrimiento en polvo epoxi-poliéster con 50 µ de espesor medio.

PKG

IMBALLO
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
59	64	97.5	0.37	4	28	

PURE LOOP MONO 4 legs with arms upholstered seat panel
5034-4LCS
Design Claus Breinholt

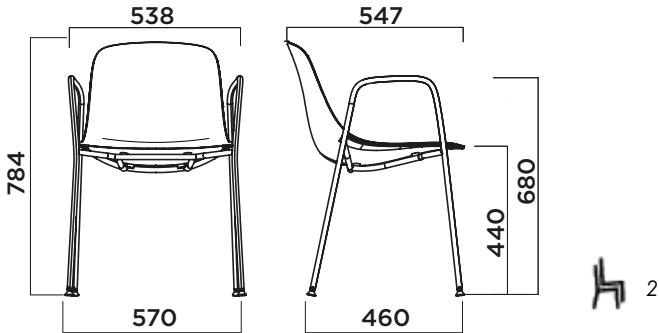

FRAME

TELAIO
BASTIDOR

Metal frame in round tube diameter 16 mm, thickness 2 mm, accordingly with UNI EN 10305-3 rule.
Telaio in metallo con tubo tondo di diametro 16mm, spessore 2mm, prodotto secondo la norma UNI EN 10305-3 .
Estructura metálica en tubo redondo diámetro 16 mm, espesor 2 mm, conforme norma UNI EN 10305-3.



SHELL

SCOCCA
CARCASA

Post consumer industrial Polypropylene + Glass Fiber
Post consumer industrial Polypropylene + Glass Fiber
Post consumer industrial Polypropylene + Glass Fiber



Polypropylene + Glass Fiber
Polypropylene + Glass Fiber
Polypropylene + Glass Fiber



UPHOLSTERY

TAPPEZZERIA
TAPIZADOS

Upholstered seat panel in PP with cutted foam thickness 1 cm and density 50 kg/m3
Upholstered seat panel in PP with cutted foam thickness 1 cm and density 50 kg/m3
Upholstered seat panel in PP with cutted foam thickness 1 cm and density 50 kg/m3

- A Space,Panarea
- B Eco Leather
- C Convert D,Velvety,Step, Step Melange, Nuvole
- D Reflect
- E Field, Oceanic, Yoredale
- F Steelcut Quartet,Canvas2
- G Divina3, Divina Melange, Fiord
- H Full Leather

COM Fabric(m)	COM Leather(m2)
0.60	0.75

FINISHING

FINITURA
ACABADO


Chrome plating with medium thickness 5 µ.Painted frame with epoxy-polyester powder with average thickness of 50 µ.
Telaio cromato con spessore medio 5 µ. Telaio verniciato con polveri epossi-poliestere spessore medio 50 µ.
Cromado con 5 µ de espesor medio. Bastidor con recubrimiento en polvo epoxi-poliéster con 50 µ de espesor medio.

PKG

IMBALLO
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
	46.5	57	81.5	0.22	2	10

PURE LOOP MONO 4 legs with arms fully upholstered
5034-4LCT
Design Claus Breinholt

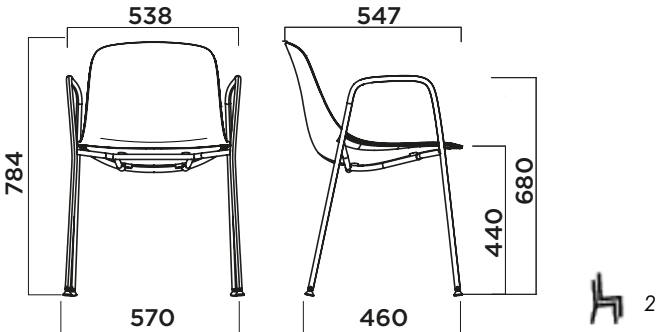

FRAME

TELAIO
BASTIDOR

Round polished tube d.16, 2 mm thickness, in conformity with uni en 10305-3 rule.
Struttura in tubo pulito tondo diametro 16 mm, spessore 2 mm, secondo norma UNI EN10305-3.
Tubo redondo pulido de 16,2 mm de diámetro, 2 mm de espesor, conforme a la norma UNI EN 10305-3.

30	31	514F	503F	6013F	3009F	01

UPHOLSTERY

TAPPEZZERIA
TAPIZADOS

- Full upholstered shell
Full upholstered shell
Full upholstered shell
- A Space,Panarea
B Eco Leather
C Convert D,Velvety,Step, Step Melange, Nuvole
D Reflect
E Field, Oceanic , Yoredale
F Steelcut Quartet,Canvas2
G Divina3, Divina Melange, Fiord
H Full Leather

COM Fabric(m)	COM Leather(m2)
0,90	1,50

FINISHING

FINITURA
ACABADO

Chrome plating with medium thickness 5 µ.Painted frame with epoxy-polyester powder with average thickness of 50 µ.
Telaio cromato con spessore medio 5 µ. Telaio verniciato con polveri epossipoliesteri spessore medio 50 µ.
Cromado con 5 µ de espesor medio. Bastidor con recubrimiento en polvo epoxi-poliéster con 50 µ de espesor medio.

PKG

IMBALLO
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
59	64	97.5	0.37	4	28	