

## Flauta H500 Spiga

■ F2343030 - Black

Designed by Patricia Urquiola, Patricia Urquiola

Collection of wall-mounted light fittings with dual light emission, available in various lengths. The units are characterised by the surface etching in two refined variations: Flauta Riga, with vertical lines, and Flauta Spiga, characterized by an elegant and sophisticated angular pattern. Rounding out the device is a deflector accessory painted to match the finish of the lamp body. It can be installed as desired on the upper or lower head to create a decorative effect with reflected light. The structure is made of aluminium treated with a chemical conversion process for effective resistance to atmospheric agents. The powder coating of the body is available in various finishes according to the QUALICOAT standard. LED light source included. Integrated 220–240 V electrical power with DALI dimmer. Comes with deflector for optional installation on the upper or lower head. LED light source included. Integrated 220–240 V electrical power with DALI dimmer. Comes with deflector for optional installation on the upper or lower head.



### Main specifications

<b>Mounting</b>	Wall	<b>Autoprotected Lamp</b>	No
<b>Environment</b>	Indoor dry location	<b>Source Power (W)</b>	12
<b>Light source type</b>	LED	<b>System Power (W)</b>	12
<b>LED type</b>	LED Module	<b>Source Flux (lm)</b>	493lm
<b>Lamp holder</b>	LED Module	<b>System Flux (lm)</b>	493

### Optical

<b>Lighting Type</b>	Indirect, Direct
<b>Lighting distribution</b>	Asymmetric
<b>CCT (K)</b>	2700
<b>CRI&gt;</b>	95
<b>Cold Beam Lighting</b>	No
<b>Extreme Cut off</b>	No

F23430\_12W\_LED\_FLAUTA H500 SPIGA

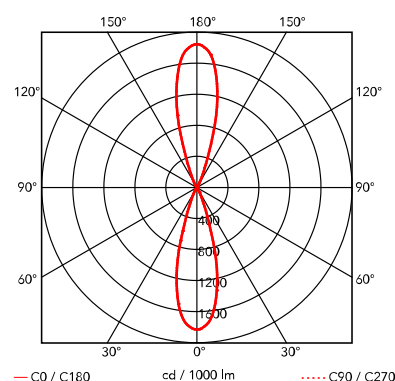

### Electrical

<b>Insulation class</b>	II	<b>Batteries Inside</b>	No
<b>Frequency (Hz)</b>	50/60		
<b>Main Voltage (Vac)</b>	220-240		
<b>Driver</b>	Integrated		
<b>Dimmable type</b>	Dimmable 1-10V		

### Physical

<b>Colour</b>	Black
<b>Net weight (kg)</b>	1.5
<b>Gross weight (kg)</b>	3.31
<b>IP</b>	40
<b>IP external</b>	40