


SuperWire T

Designed by Formafantasma, 2024

18W - 1200lm - 2700K - CRI> 90

SuperWire is the first family of modular lamps designed by Formafantasma for Flos. A magical and poetic project, with an essential design but a great stage presence, which recalls the work of the great glass masters of the last century. Made of planar glass and polished aluminum, its design originated from the development of a custom-made light source that emits a warm and homogeneous light. Made up of one or more hexagons of planar glass connected by a polished aluminum element, SuperWire lights up its entire surface thanks to a new source developed by the Flos R&D team: a very thin, flat, soft, flexible LED strip measuring up to one meter, which emits a warm and homogeneous light along its entire length and which can be easily removed for replacement and repair, unique in the panorama of LED bulb-less lamps. This table version, consists of a single module h 45 cm, surmounted by a hexagonal glass cover.



Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Download

Mounting instructions

[PDF](#)

Main specifications

| | |
|------------------------|---------------------|
| EAN | 8059607070222 |
| Mounting | Table |
| Environments | Indoor dry location |
| Light source type | LED |
| Light sources included | Yes |
| LED type | Filament LED |
| Power (W) | 18 |
| System power (W) | 18 |
| System flux (lm) | 1200 |

Physical


| | |
|---------------------|-------|
| Colour | Steel |
| Length (mm) | 449 |
| Cord colour | Clear |
| Cord length (mm) | 2000 |
| Net weight (kg) | 9 |
| Package volume (m3) | 0.2 |
| IP internal | 20 |

Ecodesign and Energy Labelling


This product contains a light source of energy efficiency class E



Replaceable (LED only) light source by an end-user



Replaceable control gear by an end-user

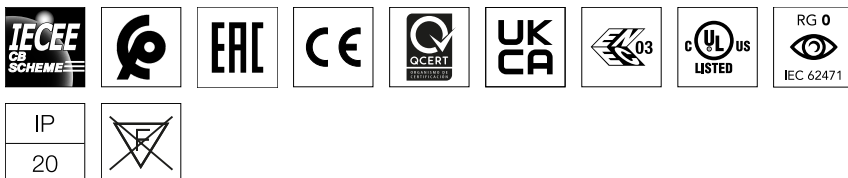

Photometric

| | |
|--------------------|------------|
| Lighting type | Total |
| Light distribution | Asymmetric |
| CCT (K) | 2700 |
| CRI> | 90 |
| Extreme cut off | No |

Electrical

| | |
|--------------------|--|
| Insulation class | III |
| Frequency (Hz) | 50/60 |
| Main voltage (Vac) | 100-240 |
| Power supply | Remote included |
| Dimmable | Yes |
| Power supply type | Dimmable |
| Dimming interface | Switch Integrated (Remote Dimmable) |
| Plug type | Type G, Type A, Type C |
| Batteries inside | No |

Spare Parts



| | | |
|-----|--|-----------|
| 00. | Kit with special screws | RF301T100 |
| 00. | Superwire T Led L450 25MA/42VDC/27K filament | RF301T200 |
| 00. | Superwire T Led L450 25MA/42VDC/27K filament kit 6 pcs | RF301T300 |
| 00. | Superwire T short glass plate and bushings | RF301T400 |
| 00. | Superwire T short glass plates and bushings kit 6 pcs | RF301T500 |



RF301T100

Kit with special screws



RF301T200

Superwire T Led L450
25MA/42VDC/27K filament



RF301T300

Superwire T Led L450
25MA/42VDC/27K filament kit 6
pcs



RF301T400

Superwire T short glass plate and
bushings



RF301T500

Superwire T short glass plates
and bushings kit 6 pcs