

OK

■ F4640030 - Black

Designed by Konstantin Grcic

Lamp providing direct light. Head in gloss varnished or chromed die-cast aluminium. Body in injection-stamped PA66+30%FV with cover in gloss varnished or chromed die-cast aluminium. Orientable head. The light fitting can be moved vertically by running the internal structure of the body on a steel cable tensioned between the ceiling and the floor (useful length 4000mm). Dimmable switch with Soft Touch technology. Adaptor on plug connector with interchangeable plugs.

Main specifications




Mounting	Suspension	Lamp holder	LED Module
Environment	Indoor dry location	Autoprotected Lamp	No
Light source type	LED	Number of heads	1
Light source replaceable	Replaceable (LED only) light source by a professional	Source Power (W)	18
	LED Module	System Flux (lm)	1551

LED type

Optical

Lighting Type	Direct
Lighting distribution	Symmetric
CCT (K)	2700K
Cold Beam Lighting	No
Extreme Cut off	No

F46400_18W_LED_OK

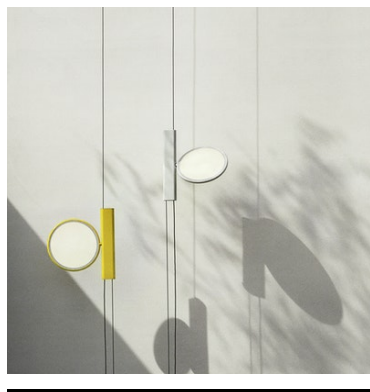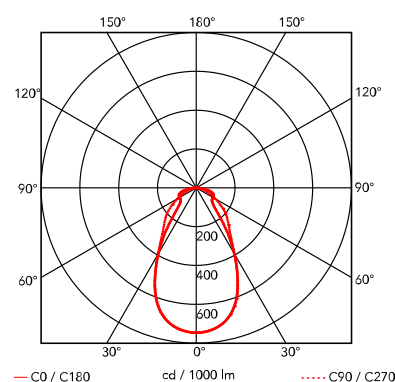

Electrical

Insulation class	III	Batteries Inside	No
Frequency (Hz)	50/60	Power supply replaceable	Replaceable control gear by an end-user
Main Voltage (Vac)	100-240/24	Cord length (mm)	4000
Driver	Remote included	Plug Type	Type G, Type A, Type C
Dimmable type	Electronic 12V	Charging Min Time	No

Physical

Colour	Black
Net weight (kg)	2.9
Gross weight (kg)	6.39
IP	20
IP external	20