


RELIEF 4 legs kitchen stool

5036-4KSP

Design Favaretto&Partners

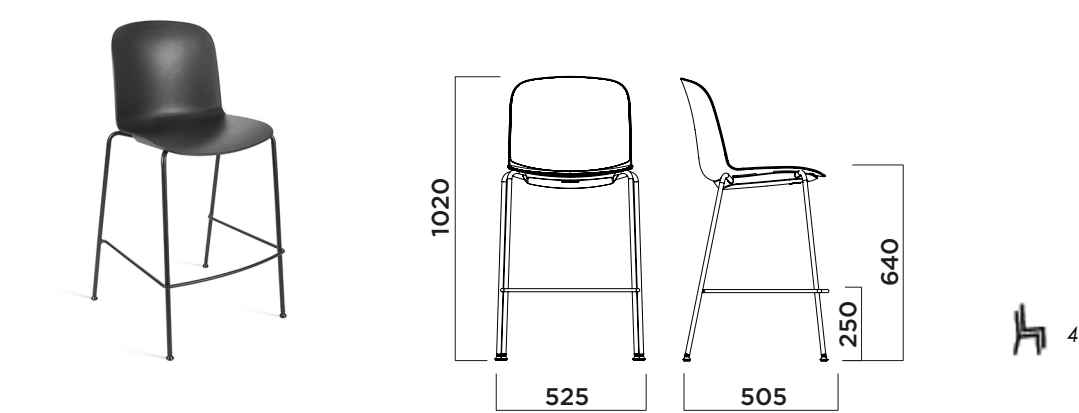

FRAME

TELAIO
BASTIDOR

Metal frame in round tube diameter 16 mm, thickness 2 mm, accordingly UNI EN 10305-3 rule in Asform.
Struttura in tubo tondo diametro 16 mm, spessore 2 mm, secondo norma UNI EN 10305-3 in Asform.
Bastidor metálico de tubo redondo de 16 mm de diámetro y 2 mm de espesor, conforme a la norma UNI EN 10305-3 en Asform



SHELL

SCocca
CARCASA

Polypropylene + Glass fiber.
Polipropilene + Fibra di vetro
Polipropileno + Fibra de vidrio.



FEATURES

CARATTERISTICHE
CARACTERÍSTICAS

Painted frame with epoxy-polyester powder with average thickness of 50 µ. Chromed frame with average thickness of 5 µ.
Telaio verniciato con polveri epossipoliesteri spessore medio di 50 µ. Telaio cromato con spessore medio 5 µ.
Bastidor con recubrimiento en polvo epoxi-poliéster con 50 µ de espesor medio. Bastidor cromado con 5 µ de espesor medio.

CERTIFICATIONS

CERTIFICAZIONI
CERTIFICADOS




PKG

IMBALLO
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
59	63	108,5	0.4	1	9,5	

RELIEF 4 legs kitchen stool upholstered seat panel
5036-4KSS
Design Favaretto&Partners

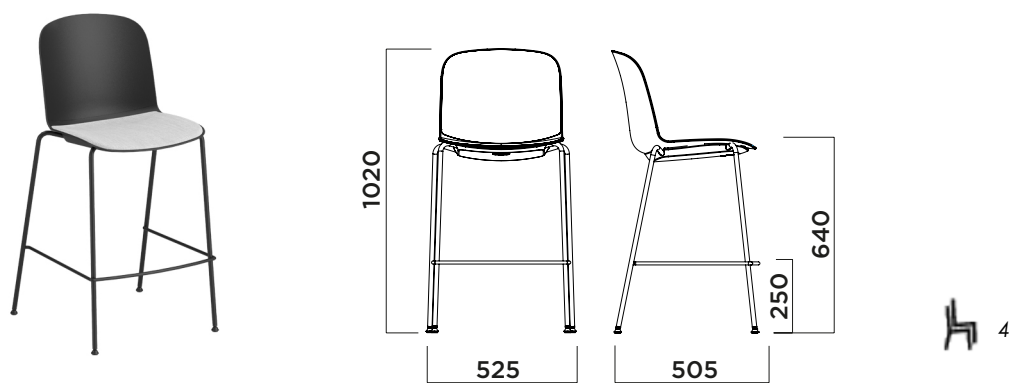

FRAME

TELAIO
BASTIDOR

Metal frame in round tube diameter 16 mm, thickness 2 mm, accordingly UNI EN 10305-3 rule in Asform.
Struttura in tubo tondo diametro 16 mm, spessore 2 mm, secondo norma UNI EN 10305-3 in Asform.
Bastidor metálico de tubo redondo de 16 mm de diámetro y 2 mm de espesor, conforme a la norma UNI EN 10305-3 en Asform



SHELL

SCOCCA
CARCASA

Polypropylene + Glass fiber.
Polipropilene + Fibra di vetro
Polipropileno + Fibra de vidrio.



UPHOLSTERY

TAPPEZZERIA
TAPIZADOS

Upholstered seat panel
Upholstered seat panel
Upholstered seat panel

- A Space, Panarea
- B Eco Leather
- C Convert D, Velvety, Step, Step Melange, Nuvole
- D Reflect
- E Field, Oceanic , Yoredale
- F Steelcut Quartet, Canvas2
- G Divina3, Divina Melange, Fiord
- H Full Leather

COM Fabric(m)	COM Leather(m2)
0,65	0.50

FEATURES

CARATTERISTICHE
CARACTERÍSTICAS


Painted frame with epoxy-polyester powder with average thickness of 50 μ . Chromed frame with average thickness of 5 μ .
Telaio verniciato con polveri epossipoliesteri spessore medio di 50 μ . Telaio cromato con spessore medio 5 μ .
Bastidor con recubrimiento en polvo epoxi-poliéster con 50 μ de espesor medio. Bastidor cromado con 5 μ de espesor medio.

PKG

IMBALLO
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
59	63	108,5	0.4	1	9,5	

RELIEF 4 legs kitchen stool fully upholstered
5036-4KST
Design Favaretto&Partners

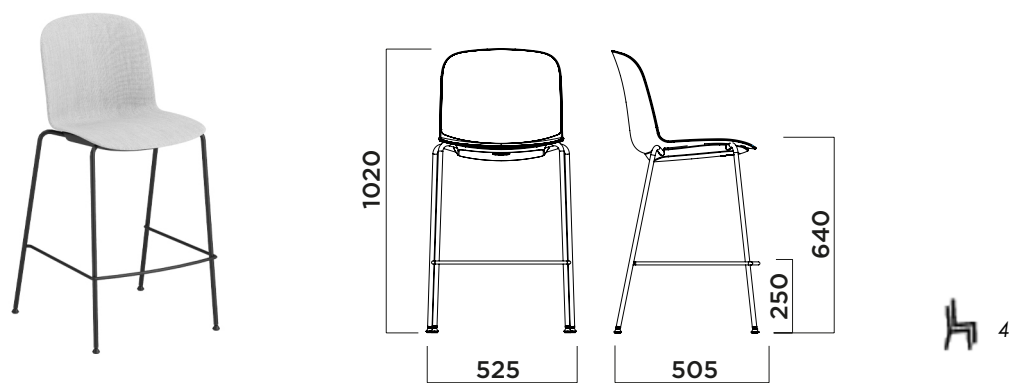

FRAME

TELAIO
BASTIDOR

Metal frame in round tube diameter 16 mm, thickness 2 mm, accordingly UNI EN 10305-3 rule in Asform.
Struttura in tubo tondo diametro 16 mm, spessore 2 mm, secondo norma UNI EN 10305-3 in Asform.
Bastidor metálico de tubo redondo de 16 mm de diámetro y 2 mm de espesor, conforme a la norma UNI EN 10305-3 en Asform



UPHOLSTERY

TAPPEZZERIA
TAPIZADOS

Full upholstered shell
Full upholstered shell
Full upholstered shell

- A Space,Panarea
- B Eco Leather
- C Convert D,Velvety,Step, Step Melange, Nuvole
- D Reflect
- E Field, Oceanic, Yoredale
- F Steelcut Quartet,Canvas2
- G Divina3, Divina Melange, Fiord
- H Full Leather

COM Fabric(m)	COM Leather(m2)
1,00	1.40

FEATURES

CARATTERISTICHE
CARACTERÍSTICAS

Painted frame with epoxy-polyester powder with average thickness of 50 µ. Chromed frame with average thickness of 5 µ.
Telaio verniciato con polveri epossi-poliestere spessore medio di 50 µ. Telaio cromato con spessore medio 5 µ.
Bastidor con recubrimiento en polvo epoxi-poliéster con 50 µ de espesor medio. Bastidor cromado con 5 µ de espesor medio.

PKG

IMBALLO
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
59	63	108,5	0.4	1	9,5	