


RELIEF 4 legs with open arms
5036-4LAP
Design Favaretto&Partners

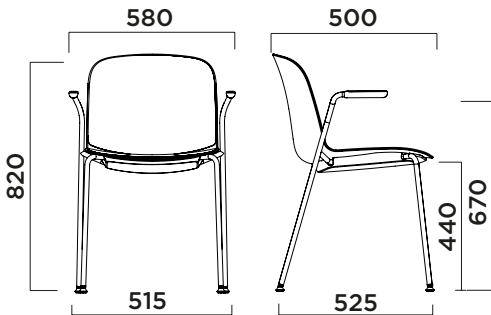

FRAME

TELAIO
BASTIDOR

Metal frame in round tube diameter 16 mm, thickness 2 mm, accordingly UNI EN 10305-3 rule in Asform.
Struttura in tubo tondo diametro 16 mm, spessore 2 mm, secondo norma UNI EN 10305-3 in Asform.
Bastidor metálico de tubo redondo de 16 mm de diámetro y 2 mm de espesor, conforme a la norma UNI EN 10305-3 en Asform



SHELL

SCOCCA
CARCASA

Polypropylene + Glass fiber.
Polipropilene + Fibra di vetro
Polipropileno + Fibra de vidrio.



FEATURES

CARATTERISTICHE
CARACTERÍSTICAS

Painted frame with epoxy-polyester powder with average thickness of 50 µ. Chromed frame with average thickness of 5 µ.
Telaio verniciato con polveri epossipoliesteri spessore medio di 50 µ. Telaio cromato con spessore medio 5 µ.
Bastidor con recubrimiento en polvo epoxi-poliéster con 50 µ de espesor medio. Bastidor cromado con 5 µ de espesor medio.

CERTIFICATIONS

CERTIFICAZIONI
CERTIFICADOS




PKG

IMBALLO
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
59	64	97,5	0.37	4	26,24	

RELIEF 4 legs open arms upholstered seat panel
5036-4LAS
Design Favaretto&Partners

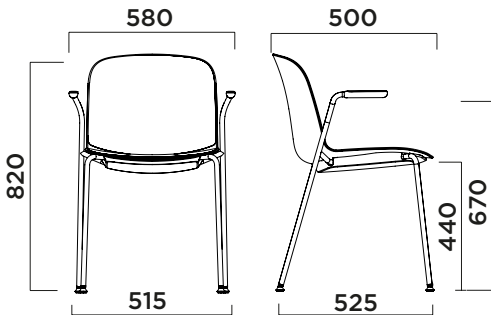

FRAME

TELAIO
BASTIDOR

Metal frame in round tube diameter 16 mm, thickness 2 mm, accordingly UNI EN 10305-3 rule in Asform.
Struttura in tubo tondo diametro 16 mm, spessore 2 mm, secondo norma UNI EN 10305-3 in Asform.
Bastidor metálico de tubo redondo de 16 mm de diámetro y 2 mm de espesor, conforme a la norma UNI EN 10305-3 en Asform



SHELL

SCOCCA
CARCASA

Polypropylene + Glass fiber.
Polipropilene + Fibra di vetro
Polipropileno + Fibra de vidrio.



UPHOLSTERY

TAPPEZZERIA
TAPIZADOS

Upholstered seat panel
Upholstered seat panel
Upholstered seat panel

- A Space, Panarea
- B Eco Leather
- C Convert D, Velvety, Step, Step Melange, Nuvole
- D Reflect
- E Field, Oceanic , Yoredale
- F Steelcut Quartet, Canvas2
- G Divina3, Divina Melange, Fiord
- H Full Leather

COM Fabric(m)	COM Leather(m2)
0.65	0.50

FEATURES

CARATTERISTICHE
CARACTERÍSTICAS


Painted frame with epoxy-polyester powder with average thickness of 50 µ. Chromed frame with average thickness of 5 µ.
Telaio verniciato con polveri epossipoliesteri spessore medio di 50 µ. Telaio cromato con spessore medio 5 µ.
Bastidor con recubrimiento en polvo epoxi-poliéster con 50 µ de espesor medio. Bastidor cromado con 5 µ de espesor medio.

PKG

IMBALLO
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
	53,5	59	89	0.28	2	14,62

RELIEF 4 legs open arms fully upholstered
5036-4LAT
Design Favaretto&Partners

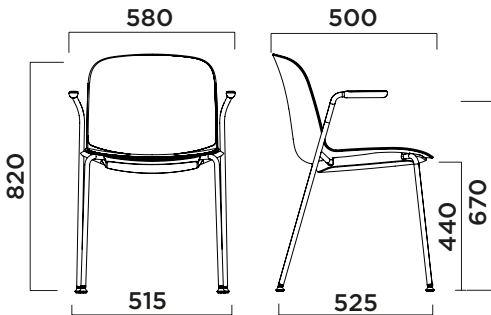

FRAME

TELAIO
BASTIDOR

Metal frame in round tube diameter 16 mm, thickness 2 mm, accordingly UNI EN 10305-3 rule in Asform.
Struttura in tubo tondo diametro 16 mm, spessore 2 mm, secondo norma UNI EN 10305-3 in Asform.
Bastidor metálico de tubo redondo de 16 mm de diámetro y 2 mm de espesor, conforme a la norma UNI EN 10305-3 en Asform



UPHOLSTERY

TAPPEZZERIA
TAPIZADOS

Full upholstered shell
Full upholstered shell
Full upholstered shell

- A Space, Panarea
- B Eco Leather
- C Convert D, Velvety, Step, Step Melange, Nuvole
- D Reflect
- E Field, Oceanic, Yoredale
- F Steelcut Quartet, Canvas2
- G Divina3, Divina Melange, Fiord
- H Full Leather

COM Fabric(m)	COM Leather(m2)
1.00	1.40

FEATURES

CARATTERISTICHE
CARACTERÍSTICAS

Painted frame with epoxy-polyester powder with average thickness of 50 µ. Chromed frame with average thickness of 5 µ.
Telaio verniciato con polveri epossipoliesteri spessore medio di 50 µ. Telaio cromato con spessore medio 5 µ.
Bastidor con recubrimiento en polvo epoxipoliéster con 50 µ de espesor medio. Bastidor cromado con 5 µ de espesor medio.

PKG

IMBALLO
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
	53,5	59	89	0.28	2	16,44