


ROUND workstations

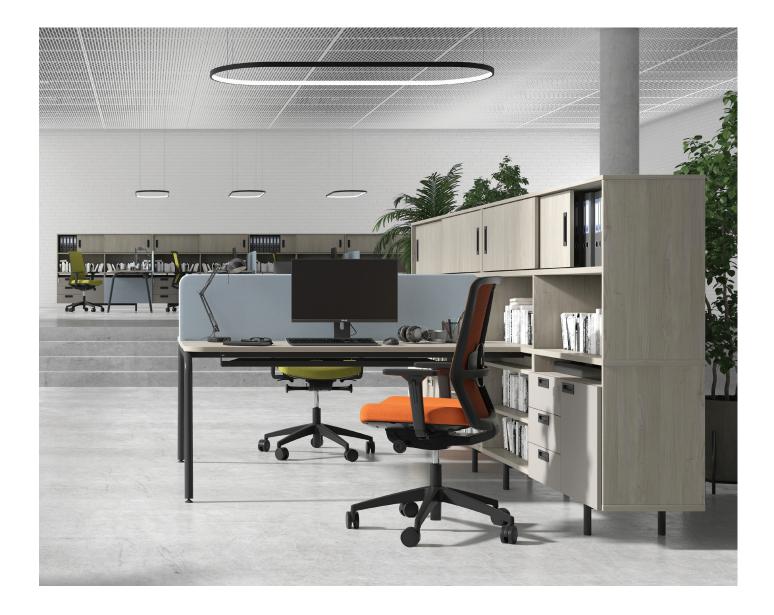

FEATURES

- Modular system includes desks, storage units and accessories
- Desks are easy to assemble, cabinets are assembled
- All electrical components are easier to install before mounting table tops
- · Convenient wire management in storage units

QUALITY STANDARDS

- EN 14073-1:2004 (storage units)
- EN 14073-2:2004 (desks and storage units)
- EN 14073-3:2004 (desks and storage units)
- EN 14074:2004 (desks and storage units)



TECHNICAL INFORMATION

DESKS

Desktop


- · 25 mm MFC (melamine) with 2 mm ABS edges;
- Melamine table top with 2 mm ABS edging or R100 Rounded corners;
- 8 mm gap between the legs and the desktop;
- 40 mm gap between the desktops in back to back benches (depth of benches – 1440/1640).

Metal beam

- Metal tube 40 x 20 mm;
- · With welded metal plates for Round leg fixing;
- Powder coated metal.

Leg

- Bended metal tube D40 x 2 mm:
- · Powder coated metal;
- · Plastic feet with height levelling (10 mm).



Screens and accessories

- NOVA fabric;
- · ROUND cable trays;
- Cable ducts, wire management and power supply products listed in pricelist.

Desktop type







Plain desktop

Desktop with a scallop for wire management

Desktop with a cut-out for grommet and wire management

Edge type






ABS edge (melamine)

R100 Rounded corners (melamine)

Desk with R100 rounded corners

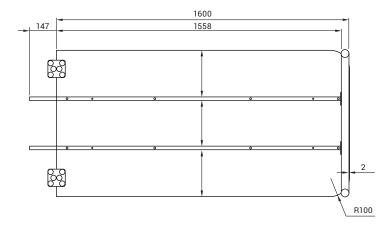

CABINETS

Carcass

• 18 mm MFC (melamine) with 1 mm ABS edging.

Top and bottom

- · 18 mm MFC (melamine) with 1 mm ABS edging;
- · 25 mm MFC (melamine) with 2 mm ABS edging.

Back

· Made of 18 mm MFC (melamine).

Shelves

- · Made of 18 mm MFC (melamine) with 1 mm ABS edging;
- Shelve in open cabinet, load max 30 kg;
- Shelve in closed cabinet, load max 15 kg.

Doors

- Doors with hinges in 18 mm MFC (melamine) with 1 mm ABS edging;
- 107° opening angle with soft closing function.





Sliding doors

- · Made of 18 mm MFC (melamine) with 1 mm ABS edging;
- · With plastic runners;
- · Plastic slide profile.

Metal frame legs

- Powder coated metal;
- Metal tube leg Ø 30;
- Metal beam 30 x 40 mm;
- Plastic legs with height levelling +- 10 mm.





SHELF UNITS

Carcass


18 mm MFC (melamine) with 1 mm ABS edging.

Top and bottom

- · 18 mm MFC (melamine) with 1 mm ABS edging;
- · 25 mm MFC (melamine) with 2 mm ABS edging.

Back

· Made of 18 mm MFC (melamine).



TOP PANEL

- Made of 25 mm MFC melamine with 2 mm ABS edging;
- One size: 1800 x 400 x 25 mm.

FABRIC BACK PANEL


- Made of 16 mm MFC (melamine);
- VB2240 foam (3 mm);
- Upholstered with fabric;
- One size: 896 x 482 x 22 mm.


Drawers

- Made of 16 mm MFC (melamine) with 1mm ABS edging (inside only white);
- Facade made of 18 mm MFC (melamine) with 1mm ABS edging;
- Bottom is made of 12 mm MFC (melamine);
- Full extension ball bearing slides with soft close, which are visible:
- Central locking (without anti-tilt);
- Small drawer can hold up to 10 kg, file drawer up to 20 kg.

Handles

 Recessed handles 145 x 42 x 15 mm (EC, MC, AC, T1C) from aluminium, powder coated.







Sliding doors

- · Made of 18 mm MFC (melamine) with 1 mm ABS edging;
- With plastic runners;
- · Plastic slide profile.

Handles

 Recessed handles 145 x 42 x 15 mm (EC, MC, AC, T1C) from aluminium, powder coated.






GUARANTEE

5 years




RANGE

DESKS

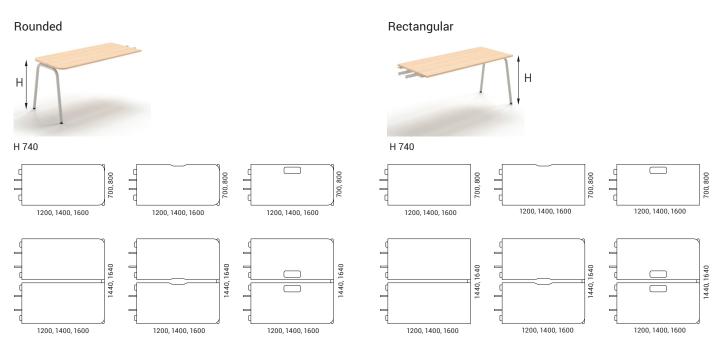


CABINETS

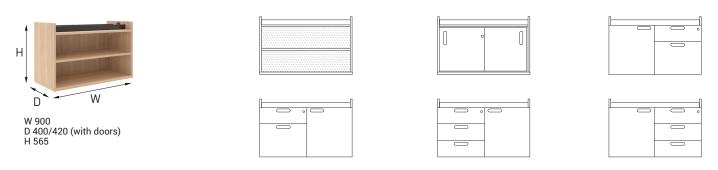

Cabinets come in 6 design types, each of which has three options. Depending on which side the cut-out for convenient wire management is, middle unit, left unit, right side unit is available.

SHELF UNITS

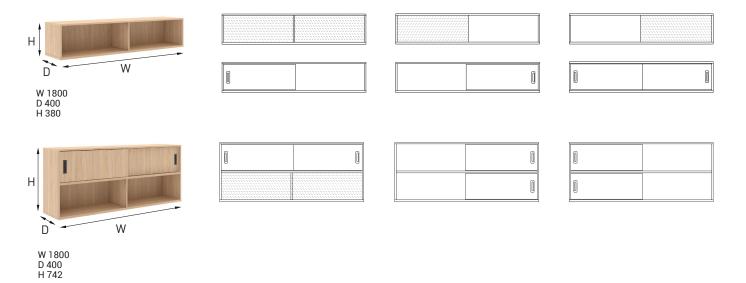

Must be ordered for desks

(for desktops with cut-out)





Metal grommet or power unit with metal frame

Optional for desks







Cable trays



Cable clips



Cable ducts



Wires

Optional for storage units


Must be ordered for storage units*



Metal frame with legs



Master key



Removal key



Cylinder lock with 2 keys





Shelf unit or top panel



Fabric back panel



Power units



Wires

*Read the additional information

ADDITIONAL INFORMATION



 Sliding doors with handle type "C" hide completely behind the outer door.



 There are no base holes in the cabinet for fixing the fabric panel. And this product is only suitable with cabinets.



 On the top of the cabinet you can notice a metal frame, which can be fixed in two ways: with screws or pressed to magnets. The looser fixing (magnets) is done for cable management.





combination of two cabinets must be ordered for workstation. Metal frame with legs and cabinet top are constructed to fit two-cabinets combination only. Cabinet top or shelf unit must be ordered to complete workstation combination.



 When you combine two cabinets, there is a seamless +-2 mm gap between them.



 The file drawer can be used to stack items or hang files. Formats that are suitable: 309, 330.




Between two metal beams, power unit can be placed. There is a free space of W-862, D-172, H-80 mm. While choosing the power unit, you have to consider if it will fit between the gap.





Between the metal beam and the top of the cabinet, there
is a 30 mm gap. The space is convenient for wires, all
types of wires can be passed through it.





• Also, the metal frame is removable, which means that all types of plugs can be inserted through it when there is a larger gap.