



Clessidra 40°+40°

■ F1584018 - Deep Brown

Designed by Antonio Citterio

Diffused direct/indirect-light wall lighting device. Body obtained by means of aluminium pressofusion and diffusers in PMMA. Aluminium wall attachment with cover in PA66. Available in white-painted or chrome-plated for indoor version and dark brown-painted or dark gray-painted for outdoor version. High-efficiency lenses specially designed for the application, non-replaceable. Wide range (100-240V) power pack integrated in the body. Level IP55

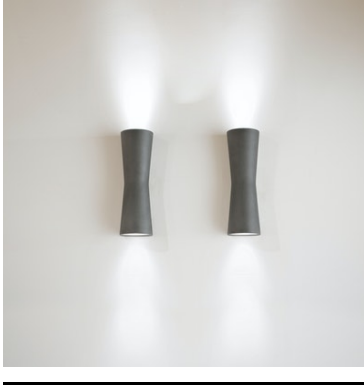


Main specifications

Mounting	Wall	Lamp holder	COB LED
Environment	Indoor Outdoor wet location	Autoprotected Lamp	No
Light source type	LED	Number of heads	2
Light source replaceable	Replaceable (LED only) light source by a professional	Source Power (W)	10
	LED array	System Flux (lm)	601
LED type			

Optical

Lighting Type	Indirect, Direct
Lighting distribution	Symmetric
CCT (K)	3000
Cold Beam Lighting	No
Extreme Cut off	No

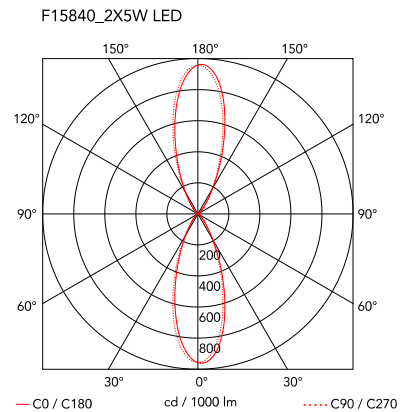

Electrical

Insulation class	I	Batteries Inside	No
Frequency (Hz)	50/60	Power supply replaceable	Replaceable control gear by a professional
Main Voltage (Vac)	100-240	Charging Min Time	No
Driver	Integrated		
Dimmable type	Non Dimmable		

Physical

Colour	Deep Brown
Net weight (kg)	1.1
Gross weight (kg)	2.43
IP	55
IP external	55