


# NOVA 0

## TECHNICAL INFORMATION



H 740



L 1200; 1400; 1600; 1800  
W 700; 800



L 1400; 1600  
W 700; 800



L 1200; 1400  
W 600



L 2400; 2800; 3200; 3600  
W 800



L 1200; 1400; 1600; 1800  
W 800



L 1200; 1400; 1600; 1800  
W 1440; 1640



L 1400; 1600  
W 1440; 1640



L 1536; 1336  
W 595



L 2400; 2800; 3200; 3600  
W 1440; 1640



L 1200; 1400; 1600; 1800  
W 1440; 1640



L 1400; 1600; 1800  
W 1200



L 800  
W 600

## Desktop

- 25mm MFC (melamine) with 2 mm ABS edges;
- 10 mm gap between the legs and the desktop;
- 40 mm gap between the desktops in back to back benches (depth of benches - 1440/1640).

## Metal beam

- Metal tube - 40x20 mm;
- With welded metal plates for leg fixing;
- Powder coated metal, colour matches the legs.

## Legs

- Welded metal tube - 40x40 mm;
- Powder coated metal;
- Plastic feet with height levelling (+10 mm).

## Desktop type



Plain desktop



Desktops with a scallop for wire management



Desktops with a cut-out for grommet and wire management

---

## MATERIALS

Melamine:



P T D1 U M1 N

Metal:



E M T1

---

## FEATURES

- Easy and fast assembling
- Metal to metal fixings
- Easy to assemble and disassemble - "metal to metal" construction
- Just one tool for assembling (DIN911 S5)
- All desks meet the requirements of the LST EN 527-3:2003 standard

---

## QUALITY STANDARD

- LST EN 527-1:2011
- LST EN 527-2:2003



---

## GUARANTEE


- 5 year

## ORDERING EAMPLE

### Code structure

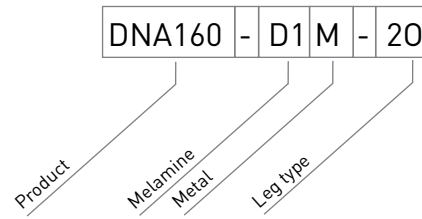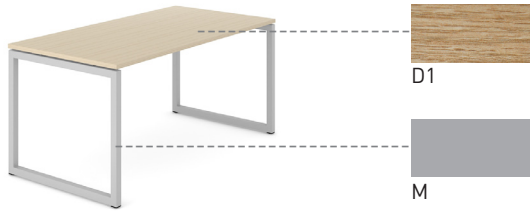

### Must be ordered (for desktop with cut-out)



Rectangular metal desk grommet

OR



Plastic grommet with a box

### Optional



Power socket blocks



Cable trays



3 cable clips



Cable ducts